MID WHEELS
RAYS

MID WHEEL COLLECTION





FORMULA DRIFT JAPAN FDJ2 OFFICIAL SUPPLIER

MID RACING

ONE-MAKE WHEEL LINE-UP
ホイールは、MID。



MARUKA SERVICE Co.,Ltd.
A Member of RAYS Group

https://www.mid-wheels.com

- Product appearance, colors, and finishes shown in this catalog may differ from the actual products due to printing, photography, lighting conditions, or size differences.
- Product specifications and prices are subject to change without prior notice.
- The suggested retail prices (excluding tax) shown in this catalog are for reference only and do not constitute the actual retail prices outside Japan.
- Specifications and prices shown in this catalog are current as of August 2026.

MID WHEELS
RAYS



2026-2027

ALL PRODUCT CATALOG

Every MID Wheel Is Tested in Japan.

More than 11 million aftermarket wheels are distributed in Japan every year.

Approximately 95% of them are manufactured overseas, contributing to the affordability of aftermarket wheels.

But one question remains:

Are they truly safe?

In Japan, aftermarket wheels must comply with the JWL technical standards established by the Ministry of Land, Infrastructure, Transport and Tourism. In addition, VIA certification, conducted by an independent third–party organization, verifies compliance with these standards.

For MID, however, compliance alone is not enough.

To ensure the highest level of safety, we believe every product should be verified once again under Japan's demanding testing environment.

That commitment comes from decades of experience as a Japanese wheel manufacturer and is the philosophy behind MID (Maruka Intelligent Design).

Because true confidence is built on uncompromising quality.

Safety starts with us.

MID Delivers the Safety and Quality of Japanese Engineering.




MID / Maruka Wheels – A Commitment to Uncompromising Quality

Aluminum wheels are available in an extensive range of styles and finishes for everything from daily driving to high–performance applications.
At Maruka Service, we regard every wheel as a critical safety component. With that responsibility in mind, we develop every product to deliver exceptional quality, reliability, and peace of mind.

Aluminum Wheel Development Process Flow

(Comparison of Typical Overseas Wheel Manufacturing and MID / Maruka Service Development)

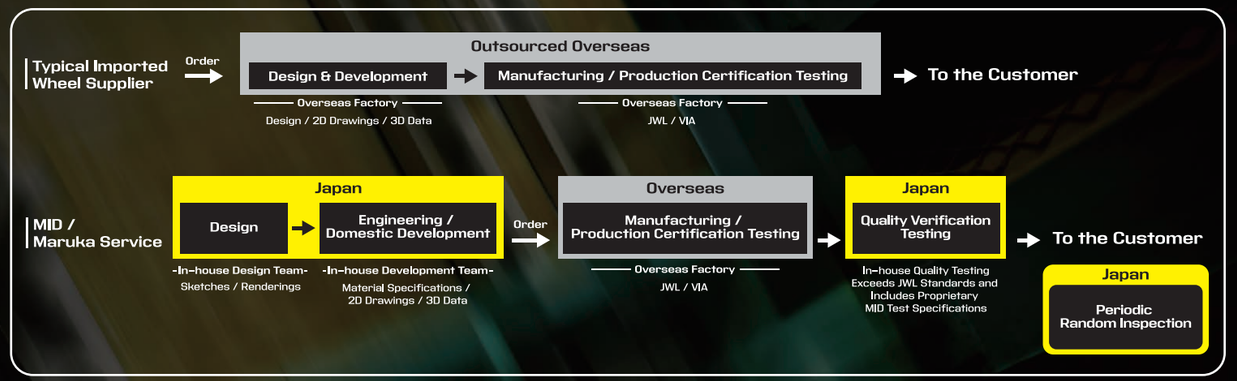

In–House Testing for Japanese Quality

At Maruka Service, every wheel undergoes both production certification testing and quality verification testing. We believe these are essential to delivering the level of quality expected from Japanese engineering. Only a limited number of companies in Japan conduct strength testing at their own facilities. Our in–house testing standards exceed VIA recommended requirements by 10–20%, helping ensure superior product safety and reliability. In addition, we perform periodic random inspections on products already in the market to verify that mass–produced wheels continue to meet our design specifications and quality standards.

Design with Safety in Mind

Our wheels are designed by one of Japan's leading industrialdesign teams specializing in automotive wheels. From spoke geometry and cross–sectional structure to the overall wheelprofile, every detail is carefully engineered with safety as a priority. Rather than focusing solely on styling trends or visualappeal, we create designsthat achieve an ideal balance of aesthetics, strength, and safety.

Experience That Sees Beyond What Is Visible

Experience That Sees Beyond What Is Visible Our experienced in–house engineering team optimizes every wheel design by calculating the ideal cross–sectional geometry, stress distribution, and structural specifications for each application.
Beyond numerical analysis, years of engineering expertise allow us to anticipate potential issues that simulations alone cannot reveal. By incorporating appropriate safety margins based on real–world experience, we thoroughly verify each design to maximize safety and reliability.

MID RACING

FDJ2 OFFICIAL SUPPLIER MID WHEELS by RAYS







FORMULA DRIFT JAPAN FDJ2 OFFICIAL SUPPLIER

Since 2025, MID WHEELS has proudly served as the exclusive wheel supplier for FORMULA DRIFT JAPAN / FDJ2 with its MID RACING lineup. Our presence in motorsports reflects the confidence we have in our products. From the demands of competition to everyday roads, we deliver uncompromising quality and reliability to every driver.

ONE-MAKE WHEEL LINE UP

2026 NEW MODEL



MID RACING R50 Evo



MID RACING R06



MID RACING R26



MID RACING R07



MID RACING R25



MID RACING TR50

NEW & PICK UP INDEX

MID|EXCLUSIVE

MID EXCLUSIVE 020F — P08 NEW
MID EXCLUSIVE 029M — P09 NEW

MID RACING

MID RACING R50 EVO — P10 NEW
MID RACING R10 EVO — P11 NEW
MID RACING R06 — P12 - P13

MID RACING TR50 — P14
MID RACING R26 — P14
MID RACING R07 — P15
MID RACING R07 TypeS — P15
MID RACING R50 — P16
MID RACING R50 TypeS — P16
MID RACING R25 Plus — P17

MID RACING R27 — P17
MID RACING R05HC [for JIMNY] — P18
MID RACING R05HC — P18
MID RACING R25 Plus [for JIMNY] — P19
MID RACING R06 — P19

MID WHEELS RAYS

MID D8 — P20 NEW

MID R12 — P20 NEW
MID M29 — P21
MID H12 — P21
MID M6 — P22
MID M62 — P22
MID M16 — P23
MID M10 — P23

NITRO POWER

NITRO POWER D8 PULSAR — P24 NEW
NITRO POWER R12 HOWITZER — P25 NEW
NITRO POWER S5 VECTOR — P26 NEW
NITRO POWER M7 PHALANX — P27
NITRO POWER H12 SHOTGUN TACTICAL EDITION — P28
NITRO POWER H12 SHOTGUN — P29

NITRO POWER H6 SLUG — P29
NITRO POWER M29 STINGER — P30
NITRO POWER M62 TOMAHAWK — P31
NITRO POWER M6 CARBINE — P31
NITRO POWER M16 ASSAULT — P32
NITRO POWER M26 CROSS FANG — P32
NITRO POWER M10 PERSHING BARREL BLACK EDITION — P33

NITRO POWER M10 PERSHING — P33
NITRO POWER M28 BULLET — P34
NITRO POWER JAVELIN — P34
NITRO POWER DERINGER — P34
NITRO POWER CROSS CLAW GRAFFITI EDITION — P35
NITRO POWER CROSS CLAW 6 Spoke Design — P35
NITRO POWER CROSS CLAW 5 Spoke Design JIMNY EXCLUSIVE MODEL — P35

MID WHEELS ORIGINAL

MID WHEELS LEFINADA MOTION6 — P36 - P37 NEW
MID WHEELS LEFINADA MOTION3 — P38
MID WHEELS LEFINADA MOTION4 — P38
MID WHEELS LEFINADA MOTION2 — P39

P40 - P41
MID DURALUMIN LOCK&NUT SET L35,
MID DURALUMIN LOCK&NUT SET L27,
MID 17HEX NUTS&LOCK SET L31,
MID PARTS Kit

P42
MID OFFICIAL GOODS

MID Technologies

Please refer to the icons shown in each product specification.

MAT — Most Advanced Technology (MAT PROCESS)

By combining ENKEI's proprietary MAT PROCESS technology—developed through motorsports—with MID's rim-forming profile, the rim section is flow-formed after casting. This process delivers the ideal rim shape while achieving an outstanding balance of lightweight construction and high strength.

KF (Knurling Finish)

The bead seat features a knurling finish to increase friction between the wheel and tire, helping to suppress tire slippage under high-load conditions and ensure stable performance.

Flow Forming

The Flow Forming process spins a cast aluminum rim blank while applying rollers to the rim section, shaping it into its final form. This simultaneously stretches and thins the rim wall, increasing aluminum density and providing greater strength than conventional cast wheels. The result is a lighter wheel with improved dynamic performance.




Aqua Cooling

During mold casting, water channels are incorporated into the mold to rapidly cool the aluminum. This refines the aluminum grain structure and enhances material strength. The process strengthens the entire wheel while reducing weight and also provides an excellent surface for polishing, brushing, and other finishing treatments.

Mist Cooling

The Mist Cooling process cools the mold using water mist instead of conventional compressed air. This enables faster, more uniform cooling, resulting in a finer and more consistent aluminum grain structure. The process contributes to weight reduction while maintaining strength and also lowers production costs, allowing forged-quality rim profiles at cast-wheel pricing.



Under Cut Finish

The undercut process removes unnecessary material from the joint between the spokes and the rim to reduce weight. By optimizing the machining for each design, it achieves an excellent balance of strength and weight reduction while creating a distinctive three-dimensional appearance. The clear coating applied over the machined surface enhances gloss, while precise control of light reflection produces a refined and dynamic finish.

Water Drain Opening


Attention has also been given to the reverse side of the wheel. Water channels extending from the hub area to the outer rim efficiently drain water trapped inside the wheel, helping prevent corrosion. This functional design also contributes to the wheel's distinctive appearance.



New Surface Finish

A wide variety of premium surface finishes enhances the appearance of each wheel. In addition to high-gloss hyper silver and metallic finishes that emphasize luxury, MID also offers polished, diamond-cut (DC), mirror-cut, and brushed finishes. Each machining technique is carefully selected to highlight the unique character and design of the wheel.


Black Metallic Polish+ Undercut Red Clear


Hyper Silver / Machined Face

Rust Prevention

Tested for 1,000 hours of Salt Spray Testing and compliant with CASS testing (240 hours).
Winter roads treated with de-icing agents and coastal environments accelerate aluminum corrosion. To ensure long-lasting durability and appearance, MID wheels undergo rigorous corrosion resistance testing, including 1,000-hour salt spray testing and 240-hour CASS testing. These tests verify outstanding corrosion resistance under harsh operating conditions.



NEW

MID|EXCLUSIVE 020F



MID EXCLUSIVE 020F

1piece 17inch 18inch 19inch 20inch 21inch

WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWA CERTIFIED

[CENTER CAP / CENTER LOCK DESIGN / MATTE BLACK] [21inch 5H-114.3&120]

[CENTER CAP / RING DESIGN / CHROME] [21inch 5H-114.3&120]

DIG837

SIZE	P.C.D.	HOLE	INSET	Maximum Lug Nut Height (mm)	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	MID ATTACHMENT PARTS	PRICE	APPLICABLE VEHICLES
17×7.0J	108&114.3	5	42(48)	Up to 38mm	73.1	29-15	7.2	4/5/6	¥55,000	5-108 VOLVO:V40(MB-), V60(ZB-/FB-) PEUGEOT:3008, 5008(P8-) FIAT/CITROEN:DOBLO/BERLINGO
17×7.0J	100&114.3	5	48(42)	Up to 32mm	73.1	29-15	7.2	4	¥55,000	
17×7.0J	112&114.3	5	55(35)	Up to 25mm	73.1	29-15	7.2	1/2/4	¥55,000	5-112 BMW:MINI(F54/55/56/57/60[Except JCW]), 118i(F40), 218i(F45), X1(F48) VW:GOLF Ⅴ,Ⅵ,Ⅶ,Ⅷ AUDI:A4(8WCVK), A5(8T), Q2(GACHZ), Q3, Q5 MERCEDES BENZ:A250(W176), A180(W177)
18×7.0J	108&114.3	5	42(48)	Up to 38mm	73.1	29-15	6.9	4/5/6	¥61,500	5-108 VOLVO:V40(MB-), V60(ZB-/FB-) PEUGEOT:3008, 5008(P8-) FIAT/CITROEN:DOBLO/BERLINGO
18×7.0J	100&114.3	5	48(42)	Up to 32mm	73.1	29-15	6.9	4/5/6	¥61,500	
18×7.0J	112&114.3	5	55(35)	Up to 25mm	73.1	29-15	6.9	1/2/4	¥61,500	5-112 BMW:MINI(F54/56/60[Except JCW]), 118i(F40), 218i(F45), X1(F48) VW:GOLF Ⅴ,Ⅵ,Ⅶ,Ⅷ AUDI:A4(8WCVK), A5(8T), Q2(GACHZ), Q3, MERCEDES BENZ:A250(W176), A180(W177), GLA250(X156), GLA180(H247), GLB200b 4MATIC(X247)
18×8.0J	114.3&120	5	42(42)	Up to 32mm	73.1	29-15	4.4	3/4	¥63,500	5-120 TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:116i(F20), 320i(E92)
19×7.5J	114.3&120	5	38(59)	Up to 43mm	73.1	29-15	9.7	3/4	¥69,000	5-120 TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:1er(Includes F20 Msport), 2er(Includes F20 Msport)
19×7.5J	108&114.3	5	45(52)	Up to 36mm	73.1	29-15	9.7	4/5/6	¥69,000	5-108 PEUGEOT:308, 508, 3008, 5008(P8-) VOLVO:XC40(XB-), XC60(UD-), V60(ZB-/FB-), FIAT/CITROEN:DOBLO/BERLINGO
19×7.5J	112&114.3	5	55(42)	Up to 26mm	73.1	29-15	9.7	1/2/4	¥69,000	5-112 AUDI:Q2(GACHZ) BMW:MINI(F54/55/56/57/60[Except JCW]), 1er(F40), 2er(G42), X1(F48) MERCEDES BENZ:A250(W176), GLA250(X156)
19×8.0J	114.3&120	5	38(42)	Up to 35mm	73.1	29-15	1.7	3/4	¥70,000	5-120 TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:3er(F30)
19×8.0J	108&114.3	5	45(35)	Up to 28mm	73.1	29-15	1.7	4/5/6	¥70,000	5-108 PEUGEOT:308, 508, 3008, 5008(P8-) VOLVO:XC40(XB-), XC60(UD-), XC90, V40(MB-) T4, V60(ZB-/FB-)
20×8.5J	108&114.3	5	38(42)	Up to 34mm	73.1	29-15	2.4	4/5/6	¥82,000	5-108 VOLVO:V60(ZB-/FB-)
20×8.5J	114.3&120	5	45(35)	Up to 27mm	73.1	29-15	2.4	3/4	¥82,000	5-120 TOYOTA:ALPHARD/VELLFIRE(40) LEXUS:LM BMW:3er(Includes F30 M Sport Brake Calipers)
21×8.5J	114.3&120	5	30(52)	Up to 43mm	73.1	29-15	TBA	3/4	¥97,000	5-120 TOYOTA:ALPHARD/VELLFIRE(40) LEXUS:LM
21×8.5J	108&114.3	5	40(42)	Up to 33mm	73.1	29-15	TBA	4/5/6	¥97,000	5-108 VOLVO:V60(ZB-/FB-), LANDROVER:EVOQUE(LZ2XA), VELAR(LY2NA) JAGUAR:F-PACE(DC2NA), E-PACE(DF2XA), I-PACE(DH1CA)
21×8.5J	114.3&120	5	45(37)	Up to 28mm	73.1	29-15	TBA	3/4	¥97,000	5-120 TOYOTA:ALPHARD/VELLFIRE(40), CROWN SEDAN LEXUS:LM

- ●Color:Semigloss black
- ●Includes center cap, center plate, screws/wrench, and valve
- ●Complies with JWL and VIA standards
- ●Replacement parts: Center cap(center lock design / matte black)¥4,000, center cap(ring design / chrome)¥4,500, center package ¥3,500, SST wrench ¥1,000, package bolts ¥1,500, valve ¥800
- ●TPMS compatible
- ●(mm): hub clearance
- ※Caution: Disk protrusion depending on size



Center lock design / matte black




Ring design / chrome
※Includes Two Designs

■ MID ATTACHMENT PARTS ※Optional



No. 1/2/4/5/6: Includes Bolt, Hubring & Adapter



No. 3:Open End Lug Nuts + Hubring

Parts No.	Bolt & nut(20pcs.)	Hubring(4pcs.)	Price
No.1	M14 × 1.5 Bolt	φ73.1-φ66.6(P.C.D.112)	¥14,000
No.2	M14 × 1.5 Bolt	φ73.1-φ57.1(P.C.D.112)	¥14,000
No.3	M14 × 1.5 Open-end wheel nut	φ73.1-φ60.1(P.C.D.120)	¥14,000
No.4	M14 × 1.5 Bolt	φ73.1-φ60.1(P.C.D.114.3)	¥17,000
No.5	M14 × 1.5 Bolt	φ73.1-φ63.4(P.C.D.108)	¥14,000
No.6	M12 × 1.25 Bolt	φ73.1-φ65.1(P.C.D.108)	¥17,000



NEW

MID|EXCLUSIVE 029M



MID EXCLUSIVE 029M

1piece 17inch 18inch 19inch 20inch 21inch

WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWA CERTIFIED

[CENTER CAP / CENTER LOCK DESIGN / MATTE BLACK] [21inch 5H-114.3&120]

[CENTER CAP / RING DESIGN / CHROME] [21inch 5H-114.3&120]

DIX219

SIZE	P.C.D.	HOLE	INSET	Maximum Lug Nut Height (mm)	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	MID ATTACHMENT PARTS	PRICE	APPLICABLE VEHICLES
17×7.0J	108&114.3	5	42(48)	Up to 43mm	73.1	29-15	9.3	4/5/6	¥55,000	5-108→VOLVO:V40(MB-), V60(ZB-/FB-) PEUGEOT:3008, 5008(P8-) FIAT/CITROEN:DOBLO/BERLINGO
17×7.0J	100&114.3	5	48(42)	Up to 37mm	73.1	29-15	9.3	3/4	¥55,000	
17×7.0J	112&114.3	5	55(35)	Up to 30mm	73.1	29-15	9.3	1/2/4	¥55,000	5-112→BMW:MINI(F54/55/56/57/60[Except JCW]), 118i(F40), 218i(F45) VW:GOLF Ⅴ,Ⅵ,Ⅶ,Ⅷ AUDI:A4(8WCVK), A5(8T), Q2(GACHZ), Q3 MERCEDES BENZ:A180(W177)
18×7.0J	108&114.3	5	42(48)	Up to 45mm	73.1	29-15	11.3	4/5/6	¥61,500	5-108→VOLVO:V40(MB-), V60(ZB-/FB-) PEUGEOT:3008, 5008(P8-) FIAT/CITROEN:DOBLO/BERLINGO
18×7.0J	100&114.3	5	48(42)	Up to 39mm	73.1	29-15	11.3	4/5/6	¥61,500	
18×7.0J	112&114.3	5	55(35)	Up to 32mm	73.1	29-15	11.3	1/2/4	¥61,500	5-112→BMW:MINI(F54/55/56/57/60[Except JCW]), 118i(F40), 218i(F45), X1(F48) VW:GOLF Ⅴ,Ⅵ,Ⅶ,Ⅷ AUDI:A4(8WCVK), A5(8T), Q2(GACHZ), Q3 MERCEDES BENZ:A250(W176), A180(W177), GLA250(X156), GLA180(H247), GLB200b 4MATIC(X247)
18×8.0J	114.3&120	5	42(42)	Up to 39mm	73.1	29-15	2.4	3/4	¥63,500	5-120→TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:116i(F20), 320i(E92)
19×7.5J	114.3&120	5	38(59)	Up to 49mm	73.1	29-15	9.0	3/4	¥69,000	5-120→TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:1er(Includes F20 Msport), 2er(Includes F20 Msport)
19×7.5J	108&114.3	5	45(52)	Up to 42mm	73.1	29-15	9.0	4/5/6	¥69,000	5-108→PEUGEOT:308, 508, 3008, 5008(P8-) VOLVO:XC40(XB-), XC60(UD-), XC90, V40(MB-) T4, V60(ZB-/FB-) FIAT/CITROEN:DOBLO/BERLINGO
19×7.5J	112&114.3	5	55(42)	Up to 32mm	73.1	29-15	9.0	1/2/4	¥69,000	5-112→AUDI:Q2(GACHZ) BMW:MINI(F54/55/56/57/60[Except JCW]), 1er(F40), X1(F48) MERCEDES BENZ:A250(W176), A180(W177), GLA250(X156), GLA180(H247), GLB200b 4MATIC(X247)
19×8.0J	114.3&120	5	38(42)	Up to 41mm	73.1	29-15	5.1	3/4	¥70,000	5-120→TOYOTA:ALPHARD/VELLFIRE(40), CROWN(SEDAN) LEXUS:LM BMW:3er(F30)
19×8.0J	108&114.3	5	45(35)	Up to 34mm	73.1	29-15	5.1	4/5/6	¥70,000	5-108→PEUGEOT:308, 508, 3008, 5008(P8-) VOLVO:XC40(XB-), XC60(UD-), XC90, V40(MB-) T4, V60(ZB-/FB-) FIAT/CITROEN:DOBLO/BERLINGO
20×8.5J	108&114.3	5	38(42)	Up to 45mm	73.1	29-15	TBA	4/5/6	¥82,000	5-108→PEUGEOT:3008, 5008(P8-) VOLVO:V60(ZB-/FB-)
20×8.5J	114.3&120	5	45(35)	Up to 38mm	73.1	29-15	TBA	3/4	¥82,000	5-120→TOYOTA:ALPHARD/VELLFIRE(40) LEXUS:LM BMW:3er(Includes F30 M Sport Brake Calipers)
21×8.5J	114.3&120	5	30(52)	Up to 49mm	73.1	29-15	2.9	3/4	¥97,000	5-120→TOYOTA:ALPHARD/VELLFIRE(40), CROWN SEDAN LEXUS:LM
21×8.5J	108&114.3	5	40(42)	Up to 39mm	73.1	29-15	2.9	4/5/6	¥97,000	5-108→VOLVO:V60(ZB-/FB-) LANDROVER:EVOQUE(LZ2XA), VELAR(LY2NA) JAGUAR:F-PACE(DC2NA), E-PACE(DF2XA), I-PACE(DH1CA)
21×8.5J	114.3&120	5	45(37)	Up to 34mm	73.1	29-15	2.9	3/4	¥97,000	5-120→TOYOTA:ALPHARD/VELLFIRE(40) LEXUS:LM

- ●Color:Semigloss black
- ●Includes center cap, center plate, screws/wrench, and valve
- ●Complies with JWL and VIA standards
- ●Replacement parts: Center cap(center lock design / matte black)¥4,000, center cap(ring design / chrome)¥4,500, center package ¥3,500, SST wrench ¥1,000, package bolts ¥1,500,valve ¥800
- ●TPMS compatible
- ●(mm): hub clearance
- ※Caution: Disk protrusion depending on size



Center lock design / matte black




Ring design / chrome
※Includes Two Designs

■ MID ATTACHMENT PARTS ※Optional



No. 1/2/4/5/6: Includes Bolt, Hubring & Adapter



No. 3:Open End Lug Nuts + Hubring

Parts No.	Bolt & nut(20pcs.)	Hubring(4pcs.)	Price
No.1	M14 × 1.5 Bolt	φ73.1-φ66.6(P.C.D.112)	¥14,000
No.2	M14 × 1.5 Bolt	φ73.1-φ57.1(P.C.D.112)	¥14,000
No.3	M14 × 1.5 Open-end wheel nut	φ73.1-φ60.1(P.C.D.120)	¥14,000
No.4	M14 × 1.5 Bolt	φ73.1-φ60.1(P.C.D.114.3)	¥17,000
No.5	M14 × 1.5 Bolt	φ73.1-φ63.4(P.C.D.108)	¥14,000
No.6	M12 × 1.25 Bolt	φ73.1-φ65.1(P.C.D.108)	¥17,000

MID RACING





MID WHEELS RAYS
MID RACING

NEW

MID RACING R50 EVO



BLACK METALLIC
［18inch 5H-114.3］

HYPER SILVER
［18inch 5H-114.3］

MID RACING R50 EVO

1piece | 17 inch | 18 inch

MAT Most Advanced Technology | KF Knurling Finish | MADE IN JAPAN | FLOW FORMING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL-VIA CERTIFIED

FJEMDR

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK METALLIC	HYPER SILVER
17×7.0J	100	4	45(43)	67.1	30-15	4.0	¥46,000	¥52,000
17×7.0J	114.3	5	45(43)	73.1	30-15	4.0	¥46,000	¥52,000
17×7.5J	100	4	45(43)	67.1	30-15	4.0	¥47,000	¥53,000
17×7.5J	114.3	5	48(43)	73.1	30-15	4.0	¥47,000	¥53,000
18×7.5J	114.3	5	48(43)	73.1	30-15	2.5	¥53,000	¥59,000
18×8.5J	100	5	45(43)	67.1	30-15	2.5	¥55,000	¥61,000
18×8.5J	114.3	5	38(43)	73.1	30-15	2.5	¥55,000	¥61,000
18×8.5J	114.3	5	45(43)	73.1	30-15	2.5	¥55,000	¥61,000
18×9.5J	114.3	5	0(43)	73.1	30-15	0.0	¥57,000	¥63,000
18×9.5J	114.3	5	10(43)	73.1	30-15	0.0	¥57,000	¥63,000
18×9.5J	114.3	5	38(43)	73.1	30-15	2.5	¥57,000	¥63,000
18×9.5J	120	5	45(43)	64.1	30-15	0.0	¥57,000	¥63,000
18×10.5J	114.3	5	12(43)	73.1	30-15	0.0	¥59,000	¥65,000
18×10.5J	114.3	5	22(43)	73.1	30-15	0.0	¥59,000	¥65,000

- Color:Black Metallic,Hyper silver
- Center cap, valve, and stickers Included
- Clears JWL/VIA standards
- Repair parts: Center cap ¥3,000,valve ¥2,400,Sticker ¥4,000
- TPMS compatible
- (mm) : Hub Clearance

※Caution: Disk protrusion depending on size



Includes Sticker Sheet

NEW

MID RACING R10 EVO



BLACK METALLIC
［17inch 5H-100］

WHITE
［17inch 5H-100］

MID RACING R10 EVO

1piece | 15 inch | 16 inch | 17 inch | 18 inch

MAT Most Advanced Technology | KF Knurling Finish | MADE IN JAPAN | FLOW FORMING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL-VIA CERTIFIED

FJEMD2

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK METALLIC	WHITE
15×5.0J	100	4	45(43)	67.1	30-15	8.0	¥38,000	¥38,000
16×6.5J	100	4	45(43)	67.1	30-15	3.0	¥41,000	¥41,000
16×7.0J	100	4	35(43)	67.1	30-15	3.0	¥42,000	¥42,000
17×7.0J	100	4	45(43)	67.1	30-15	4.8	¥46,000	¥46,000
17×7.0J	114.3	5	45(43)	73.1	30-15	4.8	¥46,000	¥46,000
17×7.5J	100	4	45(43)	67.1	30-15	4.8	¥47,000	¥47,000
17×7.5J	100	5	44(43)	67.1	30-15	4.8	¥47,000	¥47,000
17×7.5J	114.3	5	48(43)	73.1	30-15	4.8	¥47,000	¥47,000
17×8.0J	100	5	47(43)	67.1	30-15	4.8	¥48,000	¥48,000
18×7.5J	114.3	5	45(43)	73.1	30-15	2.6	¥53,000	¥53,000
18×8.5J	100	5	45(43)	67.1	30-15	2.6	¥55,000	¥55,000
18×8.5J	114.3	5	38(43)	73.1	30-15	2.6	¥55,000	¥55,000
18×8.5J	114.3	5	45(43)	73.1	30-15	2.6	¥55,000	¥55,000

- Color:Black Metallic,White
- Center cap, valve, and stickers Included
- Clears JWL/VIA standards
- Repair parts: Center cap ¥3,000,valve ¥2,400,Sticker ¥4,000
- TPMS compatible
- (mm) : Hub Clearance

※Caution: Disk protrusion depending on size



Includes Sticker Sheet



MID RACING R06



WHITE
[18inch]

BLACK CLEAR POLISH
[18inch]

CRYSTAL BLACK
[18inch]

MID RACING R06

1piece | 15inch | 16inch | 17inch | 18inch

FLOW FORMING | AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJD703

	SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	CRYSTAL BLACK	BLACK CLEAR POLISH	WHITE
	15×5.0J	100	4	45(39)	67.1	29-13	8.2	¥31,000	¥36,000	¥33,000
	15×7.0J	100	4	35(36)	67.1	29-13	0	¥34,000	—	—
	16×7.0J	100	4	35(39)	67.1	29-13	0	¥40,000	¥45,000	—
	17×6.5J ｽﾊﾞﾙ	139.7	6	38(39)	106.1	29-13	0	¥44,000	¥49,000	—
NEW	17×7.0J	114.3	5	48(43)	73.1	29-13	1.4	¥45,000	¥50,000	¥47,000
	17×7.5J	100	4	42(39)	67.1	29-15	0.3	¥46,000	—	—
	17×7.5J	100	5	40(41)	67.1	29-13	0.3	¥46,000	¥51,000	—
	17×7.5J	114.3	5	44(37)	73.1	29-13	0.3	¥46,000	¥51,000	—
NEW	18×7.5J	100	5	48(44)	67.1	29-13	0	¥50,000	¥56,000	¥52,000
	18×7.5J	114.3	5	50(43)	73.1	29-13	0	¥50,000	¥56,000	¥52,000
NEW	18×8.0J ｽﾊﾞﾙ	139.7	6	55(41)	95.1	33-15	0	¥55,000	—	—
	18×8.5J	100	5	45(35)	67.1	29-15	0	¥51,000	¥57,000	¥53,000
NEW	18×8.5J	114.3	5	45(35)	73.1	29-15	0	¥51,000	¥57,000	¥53,000
	18×8.5J	114.3	5	38(42)	73.1	29-15	0	¥51,000	¥57,000	—
	18×9.5J	120	5	■60(27)	64.1	32-15	0	¥53,000	¥59,000	¥55,000
	18×9.5J	114.3	5	12(44)	73.1	29-15	0	¥53,000	—	—
	18×9.5J	114.3	5	0(56)	73.1	29-15	0	¥53,000	—	—
	18×10.5J	114.3	5	22(38)	73.1	29-15	0	¥55,000	—	—
	18×10.5J	114.3	5	12(48)	73.1	29-15	0	¥55,000	—	—

●Color:Crystal black,Black clear polish,White
●Center cap, valve, and stickers Included
●Clears JWL, JWL-T (only for P.C.D. 139.7 size), and VIA standards
●Repair parts: Center cap ¥3,000,valve ¥800,Sticker red ¥2,000,Sticker yellow ¥2,500
●TPMS compatible
●18×8.5J, 18×9.5J, 18×10.5J feature a knurled bead seat.
●(mm): Hub Clearance
■Due to the 14R flat seat design, taper nuts cannot be used.
※Caution: Disk protrusion depending on size



Crystal black,White
Includes Sticker Sheet



Black clear polish
Includes Sticker Sheet



MID RACING TR50

MID RACING TR50

1piece | 15inch | 16inch | 17inch | 18inch | IMPORT CAR 18inch

FLOW FORMING | AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION

17inch and larger

JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED



TARMAC BLACK [18inch 5H-114.3]

TARMAC BLACK [17inch 6H-139.7]

TARMAC BLACK [15inch 4H-100]

EJF703

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
15×5.0J	100	4	45(35)	67.1	29-13	7.7	¥31,000
15×7.0J	100	4	35(35)	67.1	29-13	0.0	¥34,000
16×6.0J	100	4	45(42)	67.1	29-13	3.7	¥38,000
16×7.0J	100	4	35(35)	67.1	29-13	0.0	¥40,000
17×6.5J JWL-T	139.7	6	38(35)	106.1	29-13	0.0	¥44,000
17×7.5J	100	5	40(39)	67.1	29-13	0.0	¥46,000
17×7.5J	114.3	5	48(43)	73.1	29-13	0.0	¥46,000
17×9.0J	114.3	5	22(38)	73.1	29-13	0.0	¥49,000
18×8.0J	114.3	5	45(43)	73.1	29-13	0.0	¥50,500
18×8.5J	100	5	45(35)	67.1	29-13	0.0	¥51,000
18×9.5J	114.3	5	▲22(38)	73.1	29-13	0.0	¥53,000
18×9.5J	114.3	5	12(48)	73.1	29-13	0.0	¥53,000


●Color:Tarmac black ●Center cap, valve and sticker included
●Clears JWL/JWL-T(16×5.5J/16×6.5J/17×6.5J)/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥2,000 ●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size▲Limited quantity

for IMPORT CAR

EJF703

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	MID Parts Kit	PRICE
18×8.5J	120	5	45(35)	72.6	29-15	0.0	1/5	¥51,000

●Color:Tarmac black ●Center cap,valve and sticker included
●JWL/(5H-120)VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥2,000
●MID parts kit is required for installation. See page 41 for details.
●Flow-formed model ●TPMS compatible
●(mm): Hub Clearance





MID RACING R26

MID RACING R26

1piece | 16inch | 17inch | 18inch

FLOW FORMING | AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION

17inch and larger

JWL COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED



CRYSTAL BLACK [18inch 5H-114.3]



DEEP TITAN SILVER [18inch 5H-114.3]



DEEP TITAN SILVER [Reference Image:15×4H-100]

EJX195

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	CRYSTAL BLACK	DEEP TITAN SILVER
16×6.0J	100	4	▲43(42)	67.1	29-13	11.9	—	¥42,000
17×7.0J	100	5	▲48(43)	67.1	29-13	7.7	¥43,000	¥45,000
17×7.5J	114.3	5	▲48(43)	73.1	29-13	6.3	¥43,500	¥45,500
18×8.0J	100	5	▲45(43)	67.1	29-13	6.8	¥52,500	—
18×8.0J	114.3	5	▲45(43)	73.1	29-13	6.8	—	¥54,500
18×8.5J	100	5	▲45(36)	67.1	29-13	4.8	—	¥55,000
18×9.5J	114.3	5	12(47)	73.1	29-13	4.6	¥55,000	¥57,000
18×10.5J	114.3	5	12(45)	73.1	29-13	5.6	¥59,000	¥61,000
18×10.5J	114.3	5	22(35)	73.1	29-13	5.6	¥59,000	¥61,000

●Color:Crystal black,Deep titan silver
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥1,000
●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size
▲Limited quantity

MID RACING R07





BLACK / RIM RED LINE [18inch 5H-114.3]



BLACK / RIM RED LINE [15inch 4H-100]

MID RACING R07

1piece | 15inch | 16inch | 17inch | 18inch

FLOW FORMING | AQUA COOLING | UNDER CUT FINISH | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED

17inch and larger

EJX157

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
15×5.0J	100	4	45(35)	67	29-13	9.9	¥31,000
16×6.0J	100	4	▲43(35)	67	29-13	5.2	¥38,000
17×7.0J	100	4	45(35)	67	29-13	5.1	¥41,000
17×7.0J	114.3	5	48(42)	73	29-13	5.1	¥41,000
18×7.5J	114.3	5	50(35)	73	29-13	4.6	¥50,000
18×9.5J	114.3	5	▲12(37)	73	29-13	2.8	¥53,000

●Color:Black / rim red line
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥1,000
●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size
▲Limited quantity

MID RACING R07 TypeS



SEMIGLOSS BLACK [18inch 5H-100]



MID RACING R07 TypeS

1piece | 15inch | 17inch | 18inch

FLOW FORMING | AQUA COOLING | UNDER CUT FINISH | WATER DRAIN OPENING | RUST PREVENTION

17inch and larger

JWL COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED

EJX15F

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
15×5.0J	100	4	45(35)	67.1	29-13	9.9	¥31,000
17×7.0J	114.3	5	48(42)	73.1	29-13	5.1	¥41,000
18×8.0J	100	5	45(42)	67.1	29-13	4.6	¥50,500
18×8.0J	114.3	5	45(42)	73.1	29-13	4.6	¥50,500

●Color:Semigloss black
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥2,000
●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size



MID RACING R50



MID RACING R50

1piece | 15 inch | 17 inch | 18 inch

FLOW FORMING | AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | J/WA CERTIFIED

17 inch and larger

EJX161

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK / RIM RED LINE	WHITE / RIM RED LINE
15×5.0J	100	4	45(34)	67	29-13	7.5	–	¥33,000
17×7.0J	100	5	48(43)	67	29-13	5.2	¥41,000	–
17×7.0J	114.3	5	48(43)	73	29-13	5.2	¥41,000	¥43,000
18×7.5J	100	5	50(48)	67	29-13	3.9	¥50,000	–
18×7.5J	114.3	5	50(48)	73	29-13	3.9	¥50,000	–
18×8.0J	100	5	45(48)	67	29-13	2.9	¥50,500	–
18×8.0J	114.3	5	45(48)	73	29-13	2.9	¥50,500	–
18×9.5J	114.3	5	▲22(38)	73	29-13	0.0	¥53,000	–

●Color:Black / rim red line,White / rim red line ●Center cap, valve and sticker included ●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥1,000
●17 inch and larger are Flow-formed model ●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size
▲Limited quantity



BLACK / RIM RED LINE
［18inch 5H-114.3］



WHITE / RIM RED LINE
［Reference Image:18×5H-114.3］

for IMPORT CAR

EJX161

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	MID Parts Kit	BLACK / RIM RED LINE	WHITE / RIM RED LINE
18×8.5J	120	5	45(48)	72.6	29-15	0.2	1/5	¥51,000	¥53,000

●Color:Black / rim red line,White / rim red line
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥1,000
●MID parts kit is required for installation. See page 41 for details.
●Flow-formed model ●TPMS compatible
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size



BLACK / RIM RED LINE
［Reference Image:16×4H-100］



WHITE / RIM RED LINE
［Reference Image:16×4H-100］



MID RACING R50 TypeS

MID RACING R50 TypeS

1piece | 15 inch | 17 inch | 18 inch

FLOW FORMING | AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | J/WA CERTIFIED

17 inch and larger

EJX16D

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
15×5.0J	100	4	45(34)	67.1	29-13	7.5	¥31,000
17×7.0J	100	5	48(43)	67.1	29-13	5.2	¥41,000
17×7.0J	114.3	5	48(43)	73.1	29-13	5.2	¥41,000
18×8.0J	100	5	45(48)	67.1	29-13	2.9	¥50,500
18×8.0J	114.3	5	45(48)	73.1	29-13	2.9	¥50,500

●Color:Semigloss black
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥2,000
●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): hub clearance
※Caution: Disk protrusion depending on size



SEMIGLOSS BLACK
［18inch 5H-114.3］

SEMIGLOSS BLACK
［15inch 4H-100］



MID RACING R25 Plus



MID RACING R25 Plus

1piece | 16 inch | 17 inch | 18 inch

FLOW FORMING | AQUA COOLING | UNDER CUT FINISH | WATER DRAIN OPENING | RUST PREVENTION

17 inch and larger

JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | J/WA CERTIFIED

EJX190

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK / RIM RED LINE	DEEP TITAN SILVER	CLASSICAL BRONZE
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥38,500	–	¥38,500
17×7.0J	114.3	5	48(42)	73.1	29-13	3.9	¥43,000	–	–
17×7.5J	114.3	5	▲48(42)	73.1	29-13	1.2	–	¥45,500	–
18×7.5J	114.3	5	50(35)	73.1	29-13	0.0	¥52,000	–	–
18×8.0J	100	5	▲45(42)	67.1	29-13	0.0	–	¥54,500	–
18×8.0J	114.3	5	▲45(42)	73.1	29-13	0.0	–	¥54,500	–

●Color:Black / rim red line,Deep titan silver,Classical bronze(only 5-139.7)
●Center cap(except 5-139.7),
valve and sticker included except classical bronze
●Clears JWL/JWL-T(16×5.5J)/VIA standards
●Repair parts:Center cap except 5-139.7 ¥3,000,valve ¥800,Sticker ¥1,000
●17 inch and larger are Flow-formed model
●TPMS compatible
●(mm): hub clearance
※Caution: Disk protrusion depending on size
▲Limited quantity



BLACK / RIM RED LINE
［18inch 5H-114.3］



DEEP TITAN SILVER
［18inch 5H-114.3］



CLASSICAL BRONZE
［16inch 5H-139.7 IN20］

MID RACING R27



BLACK / RIM RED LINE
［16inch 4H-100］

MID RACING R27

1piece | 16 inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | J/WA CERTIFIED

EJG156

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
16×6.0J	100	4	43(35)	67	29-13	5.0	¥38,000

●Color:Black / rim red line
●Center cap, valve and sticker included
●Clears JWL/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,Sticker ¥1,000
●(mm): Hub Clearance
※Caution: Disk protrusion depending on size
※This product is a limited quantity item. Please be sure to inquireabout availability before purchasing.







BLACK / RIM POLISH
［16inch 5H-139.7］

BLACK RIM VERTICAL POLISH / RED LINE
［16inch 5H-139.7］

MID RACING R05HC［for JIMNY］

1piece 16inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWA CERTIFIED

EJX156

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK/ RIM POLISH	BLACK RIM VERTICAL POLISH / RED LINE
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥35,000	¥36,000

●Color:Black / rim polish,Black rim vertical polish / red line ●Valve included
●Clears JWL / JWL-T / VIA standards
●Repair parts:Valve ¥800,sticker ¥1,000
※This product is a limited quantity item. Please be sure to inquire about availability before purchasing.



BLACK / RIM RED LINE
［16inch 5H-139.7 IN20］

CLASSICAL BRONZE
［16inch 5H-139.7 IN20］

MID RACING R25 Plus［for JIMNY］

1piece 16inch

AQUA COOLING / UNDER CUT FINISH / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWA CERTIFIED

EJX190

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK / RIM RED LINE	CLASSICAL BRONZE
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥38,500	¥38,500

●Color:Black / rim red line,Classical bronze ●Valve and sticker(except classical bronze) included
●Clears JWL / JWL-T / VIA standards ●Repair parts:Valve ¥800,sticker ¥1,000 ●TPMS compatible

MID RACING R05HC



BLACK / RIM POLISH
［17inch 6H-139.7］

BLACK RIM VERTICAL POLISH / RED LINE
［17inch 6H-139.7］

MID RACING R05HC

1piece 16inch 17inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWA CERTIFIED

EJX156

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BLACK/ RIM POLISH	BLACK RIM VERTICAL POLISH / RED LINE
16×6.5J JWL-T	139.7	6	38(38)	106.1	29-13	0.0	–	¥38,000
17×6.5J JWL-T	139.7	6	38(38)	106.1	29-13	0.0	¥43,000	¥44,000

●Color:Black / rim polish,Black rim vertical polish / red line ●Center cap and valve included
●Clears JWL / JWL-T / VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800,sticker ¥1,000
●TPMS compatible
●(mm): hub clearance





BLACK CLEAR POLISH
［17inch 6H-139.7］

CRYSTAL BLACK
［17inch 6H-139.7］

MID RACING R06

1piece 17inch

FLOW FORMING / AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWA CERTIFIED



EJD703

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	CRYSTAL BLACK	BLACK CLEAR POLISH
17×6.5J JWL-T	139.7	6	38(39)	106.1	29-13	0.0	¥44,000	¥49,000

●Color:Crystal Black,Black Clear Polish ●Center cap, valve, and stickers Included
●Clears JWL, JWL-T, and VIA standards
●Repair parts: Center cap ¥3,000,valve ¥800,Sticker red ¥2,000,Sticker yellow ¥2,500
●TPMS compatible
●(mm): hub clearance
※Caution: Disk protrusion depending on size



NEW



BARREL BLACK
[18inch 9.0J 6H-139.7]

GLOSS SMOKE / MACHINED FACE
[18inch 9.0J 6H-139.7]

MID D8

1piece 18inch

WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

FJF78A

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK	GLOSS SMOKE / MACHINED FACE
18×9.0J ｼﾞｪｲﾄｩ	139.7	6	0(60)	106.1	32-15	¥75,500	¥78,000
18×9.0J ｼﾞｪｲﾄｩ	139.7	6	20(40)	106.1	32-15	¥75,500	¥78,000

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black,Gloss smoke/Machined face
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance





BARREL BLACK
[17inch 8.5J 6H-139.7]

SEMIGLOSS BLACK / CLEAR
[17inch 8.5J 6H-139.7]

MID M29

1piece 17inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZX19C

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK	SEMIGLOSS BLACK / CLEAR
17×8.5J ｼﾞｪｲﾄｩ	127	5	0(52)	71.7	33-15	¥66,000	¥68,000
17×8.5J ｼﾞｪｲﾄｩ	127	5	10(42)	71.7	33-15	¥66,000	¥68,000
17×8.5J ｼﾞｪｲﾄｩ	135	6	0(52)	87	33-15	¥66,000	¥68,000
17×8.5J ｼﾞｪｲﾄｩ	135	6	10(42)	87	33-15	¥66,000	¥68,000
17×8.5J ｼﾞｪｲﾄｩ	139.7	6	0(52)	106.1	33-15	¥66,000	¥68,000
17×8.5J ｼﾞｪｲﾄｩ	139.7	6	10(42)	106.1	33-15	¥66,000	¥68,000

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black,Semigloss Black/Cleark
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance



NEW



BARREL BLACK
[18inch 9.0J 6H-139.7]

SEMIGLOSS SMOKE / MACHINED FACE
[18inch 9.0J 6H-139.7]

MID R12

1piece 18inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

EJY27A

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK	SEMIGLOSS SMOKE / MACHINED FACE
18×9.0J ｼﾞｪｲﾄｩ	139.7	6	0(60)	106.1	32-15	¥76,500	¥79,000
18×9.0J ｼﾞｪｲﾄｩ	139.7	6	20(40)	106.1	32-15	¥76,500	¥79,000

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black,Semigloss Smoke/Machined Face
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance

H12



BARREL BLACK
[17inch 8.5J 6H-139.7]

BLACK CLEAR / MC
[17inch 8.5J 6H-139.7]



MID H12

1piece 17inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZL17G

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK	BLACK CLEAR / MC
17×8.5J ｼﾞｪｲﾄｩ	127	5	0(50)	71.7	33-15	¥64,500	¥66,500
17×8.5J ｼﾞｪｲﾄｩ	127	5	10(40)	71.7	33-15	¥64,500	¥66,500
17×8.5J ｼﾞｪｲﾄｩ	135	6	0(50)	87	33-15	¥64,500	¥66,500
17×8.5J ｼﾞｪｲﾄｩ	135	6	10(40)	87	33-15	¥64,500	¥66,500
17×8.5J ｼﾞｪｲﾄｩ	139.7	6	0(50)	106.1	33-15	¥64,500	¥66,500
17×8.5J ｼﾞｪｲﾄｩ	139.7	6	10(40)	106.1	33-15	¥64,500	¥66,500

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black,Black Clear/MC
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance



DARK BRONZE
［18inch 9.0J 6H-139.7］

GUNBLACK
［18inch 9.0J 6H-139.7］

M6



MID M6

1piece 17inch 18inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZX213

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DARK BRONZE	GUNBLACK
17×8.5J JWL-T	127	5	0(52)	71.7	33-15	¥64,500	¥64,500
17×8.5J JWL-T	127	5	10(42)	71.7	33-15	¥64,500	¥64,500
17×8.5J JWL-T	135	6	0(52)	87	33-15	¥64,500	¥64,500
17×8.5J JWL-T	135	6	10(42)	87	33-15	¥64,500	¥64,500
17×8.5J JWL-T	139.7	6	0(52)	106.1	33-15	¥64,500	¥64,500
17×8.5J JWL-T	139.7	6	10(42)	106.1	33-15	¥64,500	¥64,500
18×9.0J JWL-T	127	5	0(52)	71.7	33-15	¥76,500	¥76,500
18×9.0J JWL-T	127	5	10(42)	71.7	33-15	¥76,500	¥76,500
18×9.0J JWL-T	135	6	0(52)	87	33-15	¥76,500	¥76,500
18×9.0J JWL-T	135	6	10(42)	87	33-15	¥76,500	¥76,500
18×9.0J JWL-T	139.7	6	0(52)	106.1	33-15	¥76,500	¥76,500
18×9.0J JWL-T	139.7	6	10(42)	106.1	33-15	¥76,500	¥76,500

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Dark Bronze,Gunblack ●Included:Center cap,Valve
●Repair parts:Center cap ¥3,000,valve ¥800 ●TPMS compatible
●(mm):hub clearance



BARREL BLACK
［18inch 6H-139.7］

BARREL BLACK
［17inch 6H-139.7］

MID M62

1piece 17inch 18inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZD70C

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	PRICE
17×8.5J JWL-T	139.7	6	0(56)	106.1	33-15	¥64,500
17×8.5J JWL-T	139.7	6	10(46)	106.1	33-15	¥64,500
18×9.0J JWL-T	139.7	6	0(56)	106.1	33-15	¥76,500
18×9.0J JWL-T	139.7	6	10(46)	106.1	33-15	¥76,500

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance



M16



SEMIGLOSS BLACK
［18inch 9.0J 6H-139.7］

STEEL CLEAR
［18inch 9.0J 6H-139.7］

MID M16

1piece 17inch 18inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZX214

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	SEMIGLOSS BLACK	STEEL CLEAR
17×8.5J JWL-T	127	5	0(52)	71.7	33-15	¥64,500	¥66,500
17×8.5J JWL-T	127	5	10(42)	71.7	33-15	¥64,500	¥66,500
17×8.5J JWL-T	135	6	0(52)	87	33-15	¥64,500	¥66,500
17×8.5J JWL-T	135	6	10(42)	87	33-15	¥64,500	¥66,500
17×8.5J JWL-T	139.7	6	0(52)	106.1	33-15	¥64,500	¥66,500
17×8.5J JWL-T	139.7	6	10(42)	106.1	33-15	¥64,500	¥66,500
18×9.0J JWL-T	127	5	0(52)	71.7	33-15	¥76,500	¥78,500
18×9.0J JWL-T	127	5	10(42)	71.7	33-15	¥76,500	¥78,500
18×9.0J JWL-T	135	6	0(52)	87	33-15	¥76,500	¥78,500
18×9.0J JWL-T	135	6	10(42)	87	33-15	¥76,500	¥78,500
18×9.0J JWL-T	139.7	6	0(52)	106.1	33-15	¥76,500	¥78,500
18×9.0J JWL-T	139.7	6	10(42)	106.1	33-15	¥76,500	¥78,500

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Semigloss Black,Steel Clear
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800 ●TPMS compatible
●(mm):hub clearance



M10



BARREL BLACK
［17inch 8.5J 6H-139.7］

SEMIGLOSS BLACK
［17inch 8.5J 6H-139.7］

BLACK/DC+MC / BLACK CLEAR
［17inch 8.5J 6H-139.7］

MID M10

1piece 17inch

WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWM CERTIFIED

ZZX16E

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK	SEMIGLOSS BLACK	BLACK / DC+MC / BK CLEAR
17×8.5J JWL-T	127	5	0(52)	71.7	33-15	¥64,000	¥64,000	¥65,000
17×8.5J JWL-T	127	5	10(42)	71.7	33-15	¥64,000	¥64,000	¥65,000
17×8.5J JWL-T	135	6	0(52)	87	33-15	¥64,000	¥64,000	¥65,000
17×8.5J JWL-T	135	6	10(42)	87	33-15	¥64,000	¥64,000	¥65,000
17×8.5J JWL-T	139.7	6	0(52)	106.1	33-15	¥64,000	¥64,000	¥65,000
17×8.5J JWL-T	139.7	6	10(42)	106.1	33-15	¥64,000	¥64,000	¥65,000

●Cast 1pc. Wheel ●JWL/JWL-T VIA standards ●Color:Barrel Black,Semigloss Black,Black/DC+MC/Black Clear
●Included:Center cap,Valve ●Repair parts:Center cap ¥3,000,valve ¥800 ●TPMS compatible
●(mm):hub clearance





NEW

NITRO POWER D8 PULSAR



BARREL BLACK
［18inch 6H-139.7］

GLOSS SMOKE / MACHINED FACE
［18inch 6H-139.7］

NITRO POWER D8 PULSAR

1piece | 15inch | 16inch | 18inch

WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJF788

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	GLOSS SMOKE / MACHINED FACE
15×6.0J ジルT	139.7	6	33 (34)	106.1	29-13	0.0	¥42,500	¥45,000
16×6.0J	139.7	5	0	108.8	29-13	0.0	¥48,500	¥51,000
16×7.0J	114.3	5	40 (42)	73.1	29-13	0.0	¥50,500	¥53,000
18×8.0J ジルT	139.7	6	55 (39)	95.1	33-15	0.0	¥73,500	¥76,000

- Color:Barrel Black,Gloss smoke/machined face
- Center cap (except 5H-P.C.D.139.7) and valve included
- Clears JWL (5H114.3:690KG) / VIA standards, JWL (5H139.7:620KG) / VIA standards, JWL (6H139.7:800KG) / JWL-T (955KG) / VIA standards
- Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
- TPMS compatible
- (mm):hub clearance

※Caution:Disk protrusion depending on size





NEW

NITRO POWER R12 HOWITZER



BARREL BLACK
［18inch 5H-114.3］

SEMIGLOSS SMOKE / MACHINED FACE
［18inch 5H-114.3］

NITRO POWER R12 HOWITZER

1piece | 12inch | 14inch | 15inch | 16inch | 17inch | 18inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJY271

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	SEMIGLOSS SMOKE / MACHINED FACE
12×4.00B ジルT	100	4	42 (33)	67.1	29-13	9.9	¥28,000	¥30,500
14×4.5J	100	4	45 (35)	67.1	29-13	9.9	¥38,500	¥41,000
15×4.5J	100	4	45 (35)	67.1	29-13	9.9	¥40,000	¥42,500
15×5.5J	100	5	40 (42)	67.1	29-13	—	¥41,000	¥43,500
16×6.0J	139.7	5	0	108.8	29-13	—	¥51,000	¥53,500
17×6.5J ジルT	139.7	6	38 (34)	106.1	29-13	—	¥59,000	¥61,500
18×7.5J	114.3	5	35 (52)	73.1	29-13	—	¥70,000	¥72,500
18×7.5J	114.3	5	45 (42)	73.1	29-13	—	¥70,000	¥72,500

- Color:Barrel Black,Semigloss smoke/machined face
- Center cap and valve included
- 5H114.3: Complies with JWL (690KG) and VIA standards, 5H139.7: Complies with JWL (620KG) and VIA standards
- Repair parts:Center cap ¥3,000, valve ¥800, For 5/139.7 Sierra/Nomade models. Center cap price TBD.
- TPMS compatible
- (mm):hub clearance

※Caution:Disk protrusion depending on size





NEW

NITRO POWER S5 VECTOR



BARREL BLACK
［18inch 5H-114.3］

SEMIGLOSS SMOKE / MACHINED FACE
［16inch 5H-139.7］

1piece | 15inch | 16inch | 17inch | 18inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWM CERTIFIED

EJLAP7

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	SEMIGLOSS SMOKE / MACHINED FACE
15×4.5J	100	4	45(35)	67.1	29-13	9.9	¥40,000	¥42,500
15×6.0J	139.7	5	0	108.8	29-13	–	¥42,500	¥45,000
16×5.5J	139.7	5	20	108.8	29-13	–	¥47,500	¥50,000
16×6.0J	139.7	5	0	108.8	29-13	–	¥48,500	¥51,000
16×6.5J JWL-T	139.7	6	38(34)	106.1	29-13	–	¥49,500	¥52,000
16×7.0J	114.3	5	32(50)	73.1	29-13	–	¥50,500	¥53,000
16×7.0J	114.3	5	40(42)	73.1	29-13	–	¥50,500	¥53,000
17×7.5J	127	5	40(42)	71.7	33-15	–	¥60,500	¥63,000
18×8.0J JWL-T	139.7	6	55(39)	95.1	33-15	–	¥73,500	¥76,000

- Color:Barrel Black,Semigloss smoke/machined face
- Center cap (except 5H-P.C.D.139.7) and valve included
- 5H114.3: Complies with JWL (690KG) and VIA standards.
  5H139.7: Complies with JWL (620KG) and VIA standards.
- Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
- TPMS compatible
- (mm):hub clearance

※Caution:Disk protrusion depending on size





NITRO POWER
M7 PHALANX



MATTE BRONZE / RIM BLACK
［17inch 6H-139.7］



BARREL BLACK
［17inch 6H-139.7］



MATTE BRONZE / RIM BLACK
［14inch 4H-100］



BARREL BLACK
［14inch 4H-100］

1piece | 14inch | 15inch | 16inch | 17inch | 18inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWM CERTIFIED

EJD705

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	MATTE BRONZE / RIM BLACK
14×4.5J	100	4	45(33)	67.1	29-13	11.5	¥38,500	¥40,500
15×4.5J	100	4	45(33)	67.1	29-13	10.9	¥40,500	¥42,500
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥47,500	¥49,500
16×6.0J JWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,500	¥50,500
16×6.5J JWL-T	139.7	6	38(39)	106.1	29-13	0.0	¥49,500	–
16×7.0J	114.3	5	40(39)	73.1	29-13	0.0	¥50,500	¥52,500
17×6.5J JWL-T	139.7	6	38(39)	106.1	29-13	1.0	¥58,500	–
17×7.0J	114.3	5	42(39)	73.1	29-13	0.0	¥59,500	–
17×7.5J JWL-T	139.7	6	45(40)	106.1	29-15	0.0	¥60,500	–
18×8.0J JWL-T	139.7	6	55(39)	106.1	29-15	0.0	¥73,500	¥75,500

- Color:Matte Bronze/Rim Black,Barrel Black
- Center Cap (except 5H-P.C.D.139.7),valve included
- 14inch 4H-100 & 15inch4H-100:JWL 500KG、16inch 5H-139.7:JWL 620KG、JWL-T 700KG、16/17/18inch 6H-139.7:JWL 800KG、JWL-T 955KG,17inch 5H-114.3:JWL 690KG VIA standards
- Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
- (mm):hub clearance

※Caution:Disk protrusion depending on size







SEMIGLOSS OD GREEN
［16inch 6H-139.7］

SEMIGLOSS SAND BEIGE
［14inch 4H-100］

SEMIGLOSS CONCRETE
［16inch 6H-139.7］

GUNMETAL SILVER
［16inch 6H-139.7］

NITRO POWER H12 SHOTGUN TACTICAL EDITION

1piece | 14inch | 15inch | 16inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWM CERTIFIED

EJL17E

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	SEMIGLOSS OD GREEN	SEMIGLOSS SAND BEIGE	SEMIGLOSS CONCRETE	GUNMETAL SILVER
14×4.5J	100	4	45(33)	67.1	29-13	9.9	¥38,500	¥38,500	–	–
15×5.0J	100	4	45(33)	67.1	29-13	4.5	¥40,500	¥40,500	–	–
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥47,500	¥47,500	¥47,500	–
16×6.0J JWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,500	¥48,500	¥48,500	–
16×6.5J JWL-T	139.7	6	38(34)	106.1	29-13	0.0	¥49,500	–	¥49,500	¥49,500
16×7.0J	114.3	5	40(43)	73.1	29-13	0.0	¥50,500	–	–	–

●Color:Semigloss OD green,Semigloss sand beige,Semigloss concrete,Gunmetal silver
●Center cap (except 5H-P.C.D.139.7) and valve included
●Clears JWL/JWL-T (except P.C.D.100/114.3 size) /VIA standards
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000, valve ¥800
●TPMS compatible
●(mm) :hub clearance
※Caution:Disk protrusion depending on size



NITRO POWER
H12 SHOTGUN



NEW COLOR



BARREL BLACK
［17inch 6H-139.7］

BLACK CLEAR / MACHINING
［17inch 6H-139.7］

SEMIGLOSS SMOKE / MACHINED FACE
［18inch 6H-139.7］

BLACK CLEAR / MACHINING
［16inch 5H-139.7 IN20］

BARREL BLACK
［16inch 5H-139.7 IN-5］

NITRO POWER H12 SHOTGUN

1piece | 14inch | 15inch | 16inch | 17inch | 18inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWM CERTIFIED

EJL172

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	BLACK CLEAR / MACHINING	SEMIGLOSS SMOKE / MACHINED FACE
14×4.5J	100	4	45(33)	67.1	29-13	9.9	¥38,500	¥40,500	¥41,000
14×5.5J JWL-T	100	4	40(35)	67.1	29-13	8.0	¥39,000	¥41,000	–
15×5.0J	100	4	45(33)	67.1	29-13	4.5	¥40,500	¥42,500	¥43,000
15×6.0J JWL-T	139.7	5	-5	108.8	29-13	0.0	¥42,500	¥44,500	–
15×6.0J JWL-T	139.7	6	33(34)	106.1	29-13	0.0	¥42,500	¥44,500	–
16×5.5J JWL-T	139.7	5	20	108.8	29-13	0.0	¥47,500	¥49,500	¥50,000
16×6.0J JWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,500	¥50,500	¥51,000
16×6.5J JWL-T	139.7	6	38(34)	106.1	29-13	0.0	¥49,500	¥51,500	¥52,000
16×7.0J	114.3	5	40(43)	73.1	29-13	0.0	¥50,500	¥52,500	–
17×7.0J	127	5	▲40(42)	71.7	33-15	0.0	¥59,500	–	–
17×8.0J JWL-T	139.7	6	20(42)	106.1	29-13	0.0	¥63,500	¥65,500	–
18×8.0J JWL-T	139.7	6	55(39)	95.1	33-15	0.0	¥73,500	¥75,500	¥76,000

●Color:Barrel black,Black clear / machining,Semigloss smoke / machined face
●Center cap (except 5H-P.C.D.139.7) and valve included
●Clears JWL/JWL-T (14×5.5J/P.C.D.139.7size) /VIA standards
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
●TPMS compatible
●(mm) :hub clearance
※Caution:Disk protrusion depending on size
▲Limited quantity

NITRO POWER
H6 SLUG



SEMIGLOSS BLACK / MACHINING
［16inch 5H-114.3］

SEMIGLOSS GUNMETAL / FLANGE DC / RIM VALLEY POLISH
［16inch 5H-114.3］

BLACK CLEAR / PIERCE DRILLED
［16inch 6H-139.7］

NITRO POWER H6 SLUG

1piece | 16inch | 17inch

WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWM CERTIFIED

EJY266

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	SEMIGLOSS BLACK / MACHINING	SEMIGLOSS GUNMETAL / FLANGE DC / RIM VALLEY POLISH	BLACK CLEAR PIERCE DRILLED
16×6.0J	100	4	40(35)	67.1	29-13	¥47,500	–	–
16×6.5J JWL-T	139.7	6	38(40)	106.1	29-13	¥49,500	–	–
16×6.5J JWL-T	139.7	6	48(30)	100.1	29-13	¥49,500	–	¥51,500
16×7.0J	114.3	5	40(42)	73.1	29-13	¥51,500	¥53,500	–
17×7.0J	114.3	5	▲42(42)	73.1	29-13	¥59,500	–	–

●Color:Semigloss black / machining,Black clear / pierce drilled, Semigloss gunmetal / flange dc / rim valley polish
●Center cap and valve included
●Clears JWL/JWL-T (P.C.D.139.7 size) /VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm) :hub clearance
▲Limited quantity





BARREL BLACK
［18inch 5H-114.3］

SEMIGLOSS BLACK CLEAR
［Reference Image: 17×5H-114.3］

HYPER SILVER / MACHINED FACE
［16inch 5H-139.7 IN20］



BARREL BLACK
［17inch 5H-114.3］

BARREL BLACK
［16inch 5H-139.7 IN20］

BARREL BLACK
［16inch 6H-139.7］

SEMIGLOSS BLACK CLEAR
［14inch 4H-100］

NITRO POWER M29 STINGER

1piece | 14inch | 15inch | 16inch | 17inch | 18inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJX193

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	BARREL BLACK	SEMIGLOSS BLACK CLEAR	HYPER SILVER / MACHINED FACE
14×4.5J	100	4	45(32)	67.1	29-13	9.9	¥39,000	¥41,000	¥43,000
15×5.0J	100	4	48(32)	67.1	29-13	9.9	¥41,000	¥43,000	¥45,000
16×5.5JJWL-T	139.7	5	20	108.8	29-13	0.0	¥49,000	—	¥53,000
16×6.0J	100	5	40(34)	67.1	29-13	7.2	¥50,000	—	—
16×6.0JJWL-T	139.7	5	-5	108.8	29-13	0.0	¥50,000	—	¥54,000
16×6.5JJWL-T	139.7	6	38(39)	106.1	29-13	0.0	¥51,000	—	¥55,000
16×7.0J	114.3	5	40(42)	73.1	29-13	0.0	¥52,000	¥54,000	¥56,000
17×7.0J	114.3	5	42(42)	73.1	29-13	0.0	¥61,000	—	—
17×8.0J	114.3	5	▲35(35)	73.1	29-13	0.0	¥65,000	—	—
17×8.0JJWL-T	139.7	6	20(42)	106.1	29-13	0.0	¥65,000	—	—
18×7.0J	114.3	5	40(42)	73.1	29-13	0.0	¥70,000	—	—

●Color:Barrel black,Semigloss black clear,Hyper Silver/Machined Face
●Center cap（except 5H-P.C.D.139.7）and valve included
●Clears JWL/JWL-T（P.C.D.139.7 size）/VIA standards
●Repair parts:Center cap（except 5H-P.C.D.139.7） ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
※Caution:Disk protrusion depending on size
▲Limited quantity



BARREL BLACK
［17inch 6H-139.7］

NITRO POWER M62 TOMAHAWK

1piece | 17inch | 18inch | 20inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJD704

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
17×6.5JJWL-T	139.7	6	48(39)	100.1	29-13	2.6	¥58,500
17×6.5JJWL-T	139.7	6	38(42)	106.1	29-13	2.6	¥58,500
17×8.0JJWL-T	139.7	6	20(43)	106.1	29-13	0.0	¥63,500
18×8.0JJWL-T	139.7	6	55(41)	106.1	33-15	0.0	¥73,500
18×8.0JJWL-T	139.7	6	20(43)	106.1	29-13	0.0	¥73,500
20×8.0JJWL-T	139.7	6	55(40)	106.1	33-15	3.4	¥83,500

●Color:Barrel Black
●Center Cap,Valve included
●17/18/20inch 6H-139.7:JWL 800KG, JWL-T 955KG VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800
●(mm):hub clearance
※Caution:Disk protrusion depending on size



GUN BLACK
［16inch 5H-114.3］

DARK BRONZE
［16inch 5H-114.3］

DARK BRONZE
［16inch 6H-139.7］

GUN BLACK
［16inch 5H-139.7 IN-5］

NITRO POWER M6 CARBINE

1piece | 14inch | 15inch | 16inch | 17inch

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWA CERTIFIED

EJW606

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	GUN BLACK	DARK BRONZE
14×4.5J	100	4	45(35)	67.1	29-13	10.1	¥38,500	¥38,500
15×4.5J	100	4	45(35)	67.1	29-13	10.4	¥40,500	¥40,500
15×6.0JJWL-T	139.7	6	33(35)	106.1	29-13	0.0	¥42,500	¥42,500
15×6.0JJWL-T	139.7	5	-5	108.8	29-13	0.0	¥42,500	—
16×5.5JJWL-T	139.7	5	20	108.8	29-13	0.0	¥47,500	¥47,500
16×6.0JJWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,500	¥48,500
16×6.5JJWL-T	139.7	6	38(42)	106.1	29-13	0.0	¥49,500	¥49,500
16×6.5JJWL-T	139.7	6	48(32)	100.1	29-13	0.0	¥49,500	—
16×7.0J	114.3	5	40(43)	73.1	29-13	0.0	¥50,500	¥50,500
17×6.5JJWL-T	139.7	6	38(42)	106.1	29-13	0.0	¥58,500	—
17×6.5JJWL-T	139.7	6	48(32)	100.1	29-13	0.0	¥58,500	—
17×7.0J	114.3	5	42(43)	73.1	29-13	0.0	¥59,500	—

●Color:Gun black,Dark bronze
●Center cap（except 5H-P.C.D.139.7）, valve and sticker included
●Clears JWL/JWL-T（except P.C.D.100/114.3 size）/VIA standards
●Repair parts:Center cap（except 5H-P.C.D.139.7） ¥3,000,valve ¥800,rim sticker ¥1,000
●TPMS compatible
●(mm):hub clearance
※Caution:Disk protrusion depending on size

NITRO POWER NITRO POWER Rim sticker

M16 NITRO POWER ASSAULT





STEEL CLEAR
［17inch 6H-139.7］

SEMIGLOSS BLACK
［17inch 6H-139.7］

STEEL CLEAR
［16inch 6H-139.7］

SEMIGLOSS BLACK
［16inch 6H-139.7］

STEEL CLEAR
［16inch 5H-139.7 IN20］

NITRO POWER M16 ASSAULT

1piece 15inch 16inch 17inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWL-VIA CERTIFIED

EJK239

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	STEEL CLEAR	SEMIGLOSS BLACK
15×6.0JJWL-T	139.7	6	33(35)	106.1	29-13	¥44,500	–
16×5.5JJWL-T	139.7	5	20	108.8	29-13	¥49,500	–
16×6.5JJWL-T	139.7	6	38(35)	106.1	29-13	¥51,500	¥49,500
16×7.0J	114.3	5	40(43)	73.1	29-13	–	¥50,500
17×7.0JJWL-T	114.3	5	42(43)/55(35)	73.1	29-13	¥61,500	¥59,500
17×8.0J	139.7	6	20(38)	106.1	29-13	¥65,500	¥63,500

●Color:Steel clear, Semigloss black
●Center cap (except 5H-P.C.D.139.7) and valve included
●Clears JWL/JWL-T (except P.C.D.114.3 size) /VIA standards
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
※This product is a limited quantity item. Please be sure to inquire about availability before purchasing.

NITRO POWER M26 CROSS FANG



BLACK METALLIC / MIRROR CUT
［17inch 6H-139.7］

BARREL BLACK / DRILLED
［17inch 6H-139.7］

BLAST BLACK
［16inch 6H-139.7］

BLACK METALLIC / MIRROR CUT
［16inch 6H-139.7］

BARREL BLACK / DRILLED
［16inch 5H-139.7 IN-5］

NITRO POWER M26 CROSS FANG

1piece 15inch 16inch 17inch

AQUA COOLING / WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWL-VIA CERTIFIED

EJY268

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	BARREL BLACK/ DRILLED	BLACK METALLIC/ MIRROR CUT	BLAST BLACK
15×6.0JJWL-T	139.7	6	33(45)	106.1	29-13	¥42,000	¥43,000	–
15×6.0JJWL-T	139.7	6	45(33)	100.1	29-13	¥42,000	¥43,000	–
16×5.5JJWL-T	139.7	5	20	108.8	29-13	–	¥48,000	¥48,000
16×6.0JJWL-T	139.7	5	-5	108.8	29-13	¥48,000	¥49,000	–
16×6.5JJWL-T	139.7	6	38(44)	106.1	29-13	¥49,000	¥50,000	¥50,000
16×6.5JJWL-T	139.7	6	48(34)	100.1	29-13	¥49,000	¥50,000	–
17×6.5JJWL-T	139.7	6	38(44)	106.1	29-13	¥57,000	¥58,000	–
17×6.5JJWL-T	139.7	6	48(34)	100.1	29-13	¥57,000	¥58,000	–
17×8.0JJWL-T	139.7	6	20(42)	106.1	29-13	¥63,000	¥64,000	–

●Color:Black metallic/Mirror cut,Barrel black/Drilled,Blast black
●Center cap (except 5H-P.C.D.139.7) and valve included
●Clears JWL/JWL-T (P.C.D.139.7 size) /VIA standards
●Hub bore:P.C.D.5-139.7 φ108.8/P.C.D.6-139.7 φ106.1 (inset 45,48 is φ100.1)
●DRILL:φ29-φ13
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance



NITRO POWER M10 PERSHING BARREL BLACK EDITION



M10 PERSHING-J
BARREL BLACK
［16inch 5H-139.7 IN20］

M10 PERSHING-KC
BARREL BLACK
［15inch 4H-100］

NITRO POWER M10 PERSHING BARREL BLACK EDITION

1piece 14inch 15inch 16inch

WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWL-VIA CERTIFIED

EJX16B

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
M10 PERSHING-KC							
14×4.5J	100	4	45(33)	67.1	29-13	9.9	¥38,000
15×5.0J	100	4	45(33)	67.1	29-13	9.9	¥40,000
M10 PERSHING							
16×6.5JJWL-T	139.7	6	38(37)	106.1	29-13	0.0	¥49,000

EJX16B

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE
M10 PERSHING-J							
16×5.5JJWL-T	139.7	5	20	108.8	29-13	0.0	¥47,000
16×6.0JJWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,000
M10 PERSHING-S							
16×7.0J	114.3	5	40(42)	73.1	29-13	0.0	¥51,000

●Color:Barrel black ●Center cap (except 5H-P.C.D.139.7) and valve included
●Clears JWL/JWL-T (except P.C.D. 100/114.3) /VIA standards
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
※Caution:Disk protrusion depending on size



M10 PERSHING
SEMIGLOSS BLACK / MACHINING
［17inch 6H-139.7］

M10 PERSHING-S
BLACK / DC+MACHINING / BLACK CLEAR
［16inch 5H-114.3］

M10 PERSHING-J
SEMIGLOSS BLACK / MACHINING
［16inch 5H-139.7 IN-5］

M10 PERSHING-J
BLACK / DC+MACHINING / BLACK CLEAR
［16inch 5H-139.7 IN20］

M10 PERSHING-KC
BLACK / DC+MACHINING / BLACK CLEAR
［14inch 4H-100］

NITRO POWER M10 PERSHING

1piece 14inch 15inch 16inch 17inch

WATER DRAIN OPENING / RUST PREVENTION / JWL COMPLIANT / JWL-T COMPLIANT / VIA PASSED / JWL-VIA CERTIFIED



EJX166

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	SEMIGLOSS BLACK / MACHINING	BLACK / DC+ MACHINING / BLACK CLEAR
M10 PERSHING-KC								
14×4.5J	100	4	45(33)	67.1	29-13	9.9	¥38,000	¥39,000
15×5.0J	100	4	45(33)	67.1	29-13	9.9	¥40,000	¥41,000
M10 PERSHING								
15×6.0JJWL-T	139.7	6	33(37)	106.1	29-13	0.0	¥42,000	–
15×6.0JJWL-T	139.7	6	45(32)	100.1	29-13	0.0	¥42,000	–
16×6.5JJWL-T	139.7	6	38(37)	106.1	29-13	0.0	¥49,000	–
17×6.5JJWL-T	139.7	6	▲38(34)	106.1	29-13	0.0	–	¥58,000
17×8.0JJWL-T	139.7	6	20(41)	106.1	29-13	0.0	¥63,000	–
17×8.0JJWL-T	139.7	6	▲20(41)	106.1	29-13	0.0	–	¥64,000
M10 PERSHING-J								
16×5.5JJWL-T	139.7	5	20	108.8	29-13	0.0	¥47,000	¥48,000
16×6.0JJWL-T	139.7	5	-5	108.8	29-13	0.0	¥48,000	¥49,000
M10 PERSHING-S								
16×7.0J	114.3	5	40(42)	73.1	29-13	0.0	¥51,000	¥52,000

●Color:Semigloss black / machining,Black / DC + machining / black clear
●Center cap (except 5H-P.C.D.139.7) and valve included
●Repair parts:Center cap (except 5H-P.C.D.139.7) ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
●Clears JWL/JWL-T (P.C.D.139.7) /VIA standards
※Caution:Disk protrusion depending on size
▲Limited quantity



M28 BULLET
SEMIGLOSS BLACK / MACHINING
［20inch 6H-139.7］

M28 BULLET
BLACK / MIRROR CUT
［Reference Image: 20×6H-139.7］



M28 BULLET-S
SEMIGLOSS BLACK
［18inch 5H-114.3］

M28 BULLET-KC
SEMIGLOSS BLACK
［16inch 4H-100］

NITRO POWER
M28 BULLET
M28 BULLET KC　M28 BULLET S

NITRO POWER M28 BULLET

1piece　15 inch　16 inch　17 inch　18 inch　20 inch

WATER DRAIN OPENING　RUST PREVENTION　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJX165

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	SEMIGLOSS BLACK / MACHINING	BLACK / MIRROR CUT
M28 BULLET								
16×6.5J JWL-T	139.7	6	38 (43)	106.1	29-13	0.0	¥49,000	¥50,000
16×6.5J JWL-T	139.7	6	48 (33)	100.1	29-13	0.0	¥49,000	—
17×6.5J JWL-T	139.7	6	38 (40)	106.1	29-13	0.0	¥57,000	¥58,000
17×6.5J JWL-T	139.7	6	48 (30)	100.1	29-13	0.0	¥57,000	¥58,000
17×8.0J JWL-T	139.7	6	20 (40)	106.1	29-13	0.0	¥63,000	—
17×8.0J JWL-T	139.7	6	▲20 (40)	106.1	29-13	0.0	—	¥64,000
20×8.5J JWL-T	139.7	6	▲20 (41)	106.1	29-13	0.0	¥83,000	—
M28 BULLET-S							SEMIGLOSS BLACK	
16×7.0J	114.3	5	40 (42)	73.1	29-13	0.0	¥51,000	¥52,000
18×7.0J	114.3	5	35 (49)	73.1	29-13	0.0	¥69,000	—
18×7.0J	114.3	5	▲42 (42)	73.1	29-13	0.0	¥69,000	—
M28 BULLET-KC							SEMIGLOSS BLACK	
15×5.0J	100	4	48 (35)	67.1	29-13	9.7	¥39,000	¥40,000
16×6.0J	100	4	40 (35)	67.1	29-13	0.0	¥47,000	—

●Color:Black / mirror cut,Semigloss black / machining(only P.C.D.139.7),Semigloss black(only P.C.D.100/114.3)
●Center cap and valve included　●Repair parts:Center cap ¥3,000,valve ¥800　●TPMS compatible
●(mm):hub clearance
●1665･1765･1870･2085 are reverse rim　●Clears JWL/JWL-T(P.C.D.139.7 size)/VIA standards
※Caution:Disk protrusion depending on size
▲Limited quantity

NITRO POWER
JAVELIN



SEMIGLOSS BLACK +
PIERCE & MILLED
［17inch 6H-139.7］

BLACK METALLIC POLISH +
BLACK CLEAR + PIERCE & MILLED
［17inch 6H-139.7］

NITRO POWER JAVELIN

1piece　15 inch　16 inch　17 inch　18 inch

AQUA COOLING　WATER DRAIN OPENING　RUST PREVENTION　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJL607

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	PRICE
15×6.0J JWL-T	139.7	6	33 (34)	106.1	29-13	¥42,000
16×6.5J JWL-T	139.7	6	38 (35)	106.1	29-13	¥48,000
17×6.5J JWL-T	139.7	6	38 (34)	106.1	29-13	¥56,000
17×8.0J JWL-T	139.7	6	20 (36)	106.1	29-13	¥62,000
18×8.0J JWL-T	139.7	6	20 (38)	106.1	29-13	¥73,000

●Color:Semigloss black + pierce&milled,Black metalic polish + black clear + pierce & milled
●Center cap and valve included
●Clears JWL/JWL-T/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance

NITRO POWER
DERINGER



BLACK METALLIC POLISH / BLACK CLEAR /
FLANGE PIERCE DRILLED
6HOLE DESIGN
［20inch 6H-139.7］

SEMIGLOSS BLACK /
FLANGE PIERCE DRILLED
5HOLE DESIGN
［Reference Image: 18×5H-114.3］

NITRO POWER DERINGER

1piece　16 inch　17 inch　20 inch

AQUA COOLING　WATER DRAIN OPENING　RUST PREVENTION　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJL106

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	SEMIGLOSS BLACK / FLANGE PIERCE DRILLED	BLACK METALLIC POLISH / BLACK CLEAR / FLANGE PIERCE DRILLED
16×7.0J	114.3	5	40 (42)	73	29-13	¥51,000	—
17×8.0J JWL-T	139.7	6	▲20 (35)	106.1	29-13	—	¥64,000
20×8.5J JWL-T	139.7	6	▲20 (35)	106.1	29-13	—	¥84,000

●Color:Semigloss black / flange pierce drilled,Black metallic polish / black clear / flange pierce drilled
●Center cap and valve included
●Clears JWL/JWL-T(P.C.D.139.7 size)/VIA standards
●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
▲Limited quantity

NITRO POWER
GRAFFITI EDITION
CROSS CLAW



SEMIGLOSS BLACK＋PIERCE DRILLED /
GRAFFITI
［17inch 6H-139.7］



BLACK METALLIC＋MIRROR CUT /
GRAFFITI
［16inch 5H-139.7］



NITRO POWER CROSS CLAW GRAFFITI EDITION

1piece　15 inch　16 inch　17 inch　AQUA COOLING　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJL52A

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	Rim Depth (mm)	SEMIGLOSS BLACK＋PIERCE DRILLED / GRAFFITI	BLACK METALLIC＋MIRROR CUT / GRAFFITI
15×6.0J JWL-T	139.7	6	33 (35)	106.1	29-15	27	—	¥42,000
16×5.5J JWL-T	139.7	5	20	108.8	29-15	50	—	¥46,000
16×6.0J JWL-T	139.7	5	-5	108.8	29-15	62	¥47,000	¥47,000
16×6.5J JWL-T	139.7	6	38 (40)	106.1	29-15	38	¥48,000	¥48,000
16×6.5J JWL-T	139.7	6	48 (30)	106.1	29-15	38	—	¥48,000
17×6.5J JWL-T	139.7	6	38 (40)	106.1	29-15	38	¥56,000	¥56,000
17×6.5J JWL-T	139.7	6	48 (30)	106.1	29-15	38	—	¥56,000

●Color:Semigloss black + pierce drilled / graffiti,Black metallic + mirror cut / graffiti
●Clears JWL/JWL-T(except P.C.D.114.3/110 size)/VIA standards
●Center cap(except 5H-P.C.D.139.7)and valve included
●TPMS compatible
●(mm):hub clearance
●Repair parts:Center cap(except 5H-P.C.D.139.7)¥3,000,valve ¥800,
Graffiti decal set for Semi-gloss Black ¥2,000,Graffiti Decal Set for Black Metallic ¥2,000
●Optional parts:Graffiti decal set for Semi-gloss Black ¥2,000,
Graffiti Decal Set for Black Metallic ¥2,000
※When purchasing a graffiti set, please specify the size as the dimensions vary depending on the wheel size
●Sticker type: Semi-gloss black + Pierced drilled nails Base color →Gradient semi-gloss red plating,
Black metallic + mirror cut nail base color → red plated NITRO POWER,CROSS CLAW,The Claw
●Sticker Size:
①6 spoke design for 15inch Printac + plated seat
②6 spoke design for 16/17inch Printac + plated seat
③5 spoke design for 16/17inch Printac + plated seat
each color 6 types in total

NITRO POWER
CROSS CLAW



SEMIGLOSS BLACK＋PIERCE DRILLED
［17inch 6H-139.7］



BLACK METALLIC＋MIRROR CUT
［17inch 6H-139.7］

NITRO POWER CROSS CLAW 6 Spoke Design

1piece　15 inch　16 inch　17 inch　AQUA COOLING　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJ6932

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	Rim Depth (mm)	SEMIGLOSS BLACK＋PIERCE DRILLED	BLACK METALLIC＋MIRROR CUT
15×6.0J JWL-T	139.7	6	33 (35)	106.1	29-15	27	—	¥41,000
16×6.5J JWL-T	139.7	6	38 (40)	106.1	29-15	38	¥47,000	¥47,000
16×6.5J JWL-T	139.7	6	48 (30)	106.1	29-15	38	—	¥47,000
17×6.5J JWL-T	139.7	6	38 (40)	106.1	29-15	38	¥55,000	¥55,000
17×6.5J JWL-T	139.7	6	48 (30)	106.1	29-15	38	—	¥55,000

●Color:Semigloss black + pierce drilled,Black metallic + mirror cut
●Center cap and valve included
●Repair parts:Center cap ¥3,000,valve ¥800
●TPMS compatible
●(mm):hub clearance
●Clears JWL/JWL-T/VIA standards

NITRO POWER
CROSS CLAW



SEMIGLOSS BLACK＋PIERCE DRILLED
［16inch 5H-139.7］



BLACK METALLIC＋MIRROR CUT
［16inch 5H-139.7］

NITRO POWER CROSS CLAW 5 Spoke Design JIMNY EXCLUSIVE MODEL

1piece　16 inch　AQUA COOLING　JWL COMPLIANT　JWL-T COMPLIANT　VIA PASSED　JWM CERTIFIED

EJ6932

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	Rim Depth (mm)	SEMIGLOSS BLACK＋PIERCE DRILLED	BLACK METALLIC＋MIRROR CUT
16×5.5J JWL-T	139.7	5	20	108.8	29-15	50	—	¥45,000
16×6.0J JWL-T	139.7	5	-5	108.8	29-15	62	¥46,000	¥46,000

●Color:Semigloss black + pierce drilled,Black metallic + mirror cut
●Valve included
●Repair parts:Valve ¥800
●TPMS compatible
●Clears JWL/JWL-T/VIA standards

NEW

MID WHEELS Lefinada6 MOTION

Exclusive for Lexus & Toyota. Compatible with OEM wheel sizes, factory lug nuts/bolts, and TPMS sensor valves.

MID WHEELS LEFINADA MOTIONG

1piece | 17inch | 18inch | 19inch | 20inch | 21inch

- Compatible with Lexus OEM Wheel Sizes
- Compatible with Lexus & Toyota OEM TPMS
- Compatible with Lexus & Toyota OEM Lug Bolts
- Compatible with Lexus & Toyota OEM Lug Nuts

WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL CERTIFIED

DIY272

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE	Lug Seat Type
17×7.0J	114.3	5	40(35)	60.1	33-15	7.3	¥55,000	14R Round Seat Bolt Type(14R Radius Seat)
18×7.0J	114.3	5	39(35)	60.1	33-15	7.8	¥61,500	14R Round Seat Bolt Type(14R Radius Seat)
18×7.0J	120	5	39(35)	60.1	38-23	7.8	¥61,500	M14×1.50 Flat Seat
18×8.0J	114.3	5	45(35)	60.1	33-15	1.2	¥63,500	14R Round Seat Bolt Type(14R Radius Seat)
19×7.0J	120	5	40(35)	60.1	38-23	1.7	¥69,000	M14×1.50 Flat Seat
19×8.0J	114.3	5	45(35)	60.1	33-15	4.1	¥70,000	14R Round Seat Bolt Type(14R Radius Seat)
19×8.0J	120	5	30(50)	60.1	33-15	4.1	¥70,000	14R Round Seat Bolt Type(14R Radius Seat)
20×8.5J	114.3	5	40(35)	60.1	33-15	0.2	¥82,000	14R Round Seat Bolt Type(14R Radius Seat)
20×8.5J	120	5	30(45)	60.1	33-15	0.2	¥82,000	14R Round Seat Bolt Type(14R Radius Seat)
21×8.5J	114.3	5	40(40)	60.1	33-15	0.0	¥97,000	14R Round Seat Bolt Type(14R Radius Seat)



GLOSS BLACK
[21inch 5H-114.3]

- Color:Gloss black
- Center cap and valve included
- Clears JWL(5H114.3:690KG) / VIA standards, JWL(5H120:720KG) / VIA standards
- Repair parts:Center cap ¥3,000,valve ¥800
- TPMS compatible
- (mm) : hub clearance

※Caution: Disk protrusion depending on size



OEM Lexus center caps compatible



MID WHEELS

Lefinada 3 MOTION

Exclusive for Lexus & Toyota.
Compatible with OEM wheel sizes, factory lug nuts/bolts, and TPMS sensor valves.



MID WHEELS LEFINADA MOTION3

1piece | 17 inch | 18 inch | 19 inch | 20 inch

- Compatible with Lexus OEM Wheel Sizes
- Compatible with Lexus & Toyota OEM TPMS
- Compatible with Lexus & Toyota OEM Lug Bolts
- Compatible with Lexus & Toyota OEM Lug Nuts

FLOW FORMING | AQUA COOLING | UNDER CUT FINISH | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | JWL-T COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED

DIX18B

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE	Lug Seat Type
17×6.5J	120	5	40(35)	60.1	38-23	3.31	¥53,500	Flat Seat
17×7.0J	114.3	5	40(50)	60.1	34-19	10.6	¥54,000	Flat Seat
18×7.0J	114.3	5	40(51)	60.1	29-15	10.7	¥63,000	14R Round Seat(14R Radius Seat)
18×7.0J	120	5	40(40)	60.1	38-23	10.7	¥59,000	Flat Seat
18×8.0J	114.3	5	41(42)	60.1	29-15	6.0	¥64,000	14R Round Seat(14R Radius Seat)
18×8.0J	114.3	5	42(42)	60.1	34-19	6.0	¥60,000	Flat Seat
18×8.0J JWL-T	139.7	6	50(37)	95.1	38-23	0.9	¥62,000	Flat Seat
19×7.0J	114.3	5	40(40)	60.1	34-19	5.0	¥68,000	Flat Seat
19×7.0J	120	5	40(40)	60.1	38-23	5.0	¥68,000	Flat Seat
20×8.5J	114.3	5	44(42)	60.1	29-15	5.2	¥85,000	14R Round Seat(14R Radius Seat)



HYPER METAL COAT
[20inch 5H-114.3]



HYPER METAL COAT
[18inch 6H-139.7]

- Color:Hyper metal coat ●Center cap and valve included
- Clears JWL(5-120:720KG)/JWL-T(18×8.0J 6-139.7)/VIA standards
- Repair parts:Center cap ¥3,000,valve ¥800
- Flow-formed model
- TPMS compatible
- (mm): hub clearance
- These products are compatible with OEM Lexus center caps: [42603-30550], [42603-50380], [42603-53110].

※Caution: Disk protrusion depending on size



OEM Lexus center caps compatible



MID WHEELS Lefinada 4 MOTION

Exclusive for Lexus & Toyota.
Compatible with OEM wheel sizes, factory lug nuts/bolts, and TPMS sensor valves.

MID WHEELS LEFINADA MOTION4

1piece | 17 inch | 18 inch | 19 inch | 20 inch | 21 inch

- Compatible with Lexus OEM Wheel Sizes
- Compatible with Lexus & Toyota OEM TPMS
- Compatible with Lexus & Toyota OEM Lug Bolts

FLOW FORMING | UNDER CUT FINISH | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED

DIY25D

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE	Lug Seat Type
17×7.0J	114.3	5	40(50)	60.1	33-15	7.5	¥54,000	14R Round Seat(14R Radius Seat)
18×7.5J	120	5	38(33)	60.1	33-15	1.9	¥63,500	60° Taper Seat★
18×8.0J	114.3	5	42(42)	60.1	33-15	2.8	¥64,000	14R Round Seat(14R Radius Seat)
19×8.0J	114.3	5	45(42)	60.1	33-15	0.0	¥73,000	14R Round Seat(14R Radius Seat)
20×8.5J	114.3	5	45(42)	60.1	33-15	2.5	¥85,000	14R Round Seat(14R Radius Seat)
21×8.0J	114.3	5	40(42)	60.1	33-15	0.0	¥91,000	14R Round Seat(14R Radius Seat)

- Color:Gloss black
- Center cap and valve included
- JWL-VIA standard compliant
- Repair parts:Center cap ¥3,000,valve ¥800
- Flow-formed model
- TPMS compatible
- (mm): hub clearance
- Items marked with ★ include M14×1.5 nuts.
- These products are compatible with genuine Lexus center caps:[42603-30550] [42603-50380][42603-53110]

※Caution: Disk protrusion depending on size



GLOSS BLACK
[20inch 5H-114.3]



MID WHEELS

Lefinada 2 MOTION



HYPER DARK SILVER / RIM EDGE POLISH
[20inch 5H-114.3]

MID WHEELS LEFINADA MOTION2

1piece | 17 inch | 18 inch | 19 inch | 20 inch | 21 inch

- Compatible with Lexus OEM Wheel Sizes
- Compatible with Lexus & Toyota OEM TPMS
- Compatible with Lexus & Toyota OEM Lug Bolts
- Compatible with Lexus & Toyota OEM Lug Nuts

AQUA COOLING | WATER DRAIN OPENING | RUST PREVENTION | JWL COMPLIANT | VIA PASSED | JWL/VIA CERTIFIED

DIJ811

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE	Lug Seat Type
17×7.0J	114.3	5	39(53)	60.1	33-19	7.5	¥54,000	Flat Seat
17×7.0J	114.3	5	40(53)	60.1	29-15	7.5	¥58,000	14R Round Seat(14R Radius Seat)
18×7.5J	114.3	5	34(61)	60.1	29-15	6.6	¥63,000	14R Round Seat(14R Radius Seat)
18×7.5J	114.3	5	35(60)	60.1	33-19	6.6	¥59,000	Flat Seat
18×7.5J	114.3	5	45(50)	60.1	33-19	6.6	¥59,000	Flat Seat
18×8.0J	114.3	5	30(50)	60.1	33-19	4.6	¥60,000	Flat Seat
18×8.0J	114.3	5	45(35)	60.1	33-19	4.6	¥60,000	Flat Seat
18×8.0J	114.3	5	45(35)	60.1	29-15	4.6	¥64,000	14R Round Seat(14R Radius Seat)

DIJ811

SIZE	P.C.D.	HOLE	INSET	HUB BORE (φ)	DRILL (φ)	DISK凸 (mm)	PRICE	Lug Seat Type
19×8.0J	114.3	5	45(38)	60.1	33-19	6.1	¥69,000	Flat Seat
19×8.0J	114.3	5	45(35)	60.1	29-15	6.1	¥73,000	14R Round Seat(14R Radius Seat)
19×8.0J	120	5	24(32)	60.1	33-15	1.2	¥73,000	14R Round Seat(14R Radius Seat)
19×8.0J	120	5	25(32)	60.1	38-23	1.2	¥69,000	Flat Seat
20×8.0J	114.3	5	40(40)	60.1	33-15	2.4	¥82,000	14R Round Seat(14R Radius Seat)
20×8.5J	114.3	5	35(35)	60.1	33-19	1.3	¥81,000	Flat Seat
21×8.0J	114.3	5	40(40)	60.1	33-15	2.2	¥91,000	14R Round Seat(14R Radius Seat)

- Color:Hyper dark silver / rim edge polish ●Center cap and valve included ●Clears JWL/VIA standards
- Repair parts:Center cap ¥3,000,valve ¥400 ●TPMS compatible
- (mm): hub clearance
- These products are compatible with OEM Lexus center caps: [42603-30550], [42603-50380], [42603-53110].

※Caution: Disk protrusion depending on size



OEM Lexus center caps compatible





DURA-NUTS
MADE IN JAPAN

DURALUMIN 19HEX LENGTH 35 m/m



MID DURALUMIN LOCK& NUT SET L35

MID DURALUMIN LOCK&NUT SET L35
for 5H:¥15,000
Contents:19HEX nuts(16pc),lock nuts(4pc),L41 key adapter(1pc)
Size:M12×1.5/M12×1.25
Color:black,red,blue

×16 nut ×4 lock nut ×1 key adapter



MID DURALUMIN LOCK NUT L35 4pc pack



MID DURALUMIN NUT L35 4pc pack

valid screw depth 25mm

MID DURALUMIN LOCK NUT L35 4pc pack
4pc:¥5,500
Contents:lock nuts(4pc),L41 key adapter(1pc)
Size:M12×1.5/M12×1.25
Color:black,red,blue

×4 lock nut ×1 key adapter

MID DURALUMIN NUT L35 4pc pack
4pc:¥3,000
Contents:19HEX nuts(4pc)
Size:M12×1.5/M12×1.25
Color:black,red,blue

×4 nut

MID DURALUMIN LOCK NUT L35(1pc)
1pc:¥1,000
Size:M12×1.5/M12×1.25
Color:black,red,blue

×1 lock nut

MID DURALUMIN NUT L35(1pc)
1pc:¥750
Size:M12×1.5/M12×1.25
Color:black,red,blue

×1 nut

MID DURALUMIN LOCK NUT L41 KEY ADAPTER
1pc:¥1,500

×1 key adapter

SHORT TYPE LENGTH 27 m/m



valid screw depth 20mm

MID DURALUMIN LOCK&NUT SET L27 Short
for 4H:¥13,000
Contents:19HEX nuts(12pc),lock nuts(4pc), L41 key adapter(1pc)
Size:M12×1.5/M12×1.25
Color:black,red,blue

×12 nut ×4 lock nut ×1 key adapter

MID DURALUMIN NUT L27 SHORT(1pc)
1pc:¥750
Size:M12×1.5/M12×1.25
Color:black,red,blue

×1 nut

MID DURALUMIN LOCK NUT L27 SHORT(1pc)
1pc:¥1,000
Size:M12×1.5/M12×1.25
Color:black,red,blue

×1 lock nut

MID DURALUMIN LOCK NUT L41 KEY ADAPTER
1pc:¥1,500

×1 key adapter

*When purchasing lock nuts and lock nut key adapters, please specify the number on the product.

MID WHEELS RAYS



17HEX NUTS &LOCK SET

2PC STEEL NUT 17HEX LENGTH 31 m/m



MID 17HEX NUTS&LOCK SET L31 24pack(6hole type)
for 6H: ¥7,500
Contents: 17HEX nuts(20pc),lock nuts(4pc),key adapter(1pc), 17HEX long adapter(tool size compatible with 17/19/21HEX)
Size:M12×1.5/M12×1.25
Color: Chrome plated,Black

×20 nut ×1 long adapter
×4 lock nut ×1 key adapter



MID 17HEX NUTS&LOCK SET L31 20pack(5hole type)
for 5H: ¥7,000
Contents: 17HEX nuts(16pc),lock nuts(4pc),key adapter(1pc), 17HEX long adapter(tool size compatible with 17/19/21HEX)
Size:M12×1.5/M12×1.25
Color: Chrome plated,Black

×16 nut ×1 long adapter
×4 lock nut ×1 key adapter

MID 17 HEX NUT L31(1pc)
1pc:¥250
Size:M12×1.5/M12×1.25
Color:Chrome plated,Black

×1 nut

MID 17 HEX LOCK NUT(1pc)
1pc:¥600
Size:M12×1.5/M12×1.25
Color:Chrome plated,Black

×1 lock nut

MID 17 HEX LOCK NUT KEY ADAPTER
1pc:¥1,200

×1 key adapter

MID 17 HEX LONG ADAPTER 17/19/21 HEX
1pc:¥800
Size:68mm/23.8Φ
Color:Chrome plated

×1 long adapter





valid screw depth 22mm

MID PARTS Kit

17HEX Bolt : Chrome



17HEX Bolt : Black



Hubring




Long Adapter



x1 included

Kit No.	17HEX Bolt(20pcs.)	Hubring(4pcs.)	Price	
			Chrome	Black
1	M12×1.5 L26	-	¥10,000	¥12,000
2	M12×1.5 L26	Φ74.1-Φ72.6	¥14,000	¥16,000
3	M14×1.5 L26	-	¥10,000	¥12,000
4	M14×1.5 L26	Φ66.6-Φ57.1	¥14,000	¥16,000
5	M14×1.25 L28	-	¥10,000	¥12,000
6	M14×1.25 L28	Φ74.1-Φ72.6	¥14,000	¥16,000
7	M14×1.5 L26	Φ73.0-Φ60.0	¥14,000	¥16,000

MID OFFICIAL GOODS

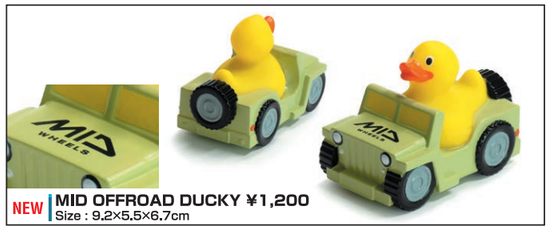

NEW | MID OFFROAD DUCKY ¥1,200
Size : 9.2×5.5×6.7cm



NEW | MID RACING DUCKY ¥1,200
Size : 7.7×6.3×6.6cm



NEW | MID WHEELS NEON KEY CHAIN ¥1,500
Size : L7×W6.5×H0.3cm



NEW | MID RACING NEON KEY CHAIN ¥1,500
Size : L10.5×W1.5×H0.3cm



NEW | MID RUBBER COASTER ¥1,000
Size : 9.0×9.0cm



NEW | MID AIR FRESHENER ¥800



NEW | MID WORK GLOVES ¥1,200



MID Lucky Charm ¥1,000



MID Tumbler 350ml ¥2,000



MID Eco Bag ¥300



MID Sponge (Logo) ¥300



MID 6-Color Ballpoint Pen ¥300



MID Toilet Paper Roll ¥250

MID MULTI GEAR


MID Multi-Gear Key Holder
Size : 8cm×3.2cm ¥1,500


3 Functions

1_Contactless Door Opener

2_Contactless Button Pusher

3_Utility Hook



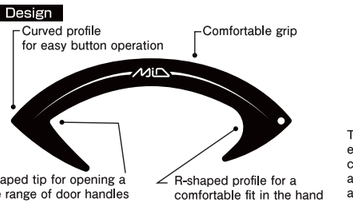



The MID Multi-Gear Key Holder is a convenient everyday tool designed for a variety of situations. It combines a contactless door opener, button pusher, and utility hook in a compact form, while also serving as a stylish key holder.

MID STICKER



MID STICKER
¥1,500





NITRO POWER STICKER
White /¥2,000
Black /¥2,000

MID HANDTOWEL

MID Hand Towel / Size : 34cm×37cm
Material: 100% Cotton

Made from 100% cotton, the MID Hand Towel offers a soft, comfortable feel and a practical size for everyday use. Featuring a bold graphic inspired by a wheel, it combines functionality with a distinctive design, making it perfect for daily use.



INSTALLING AIR VALVE

AIR VALVE INSTALLATION

Use only the dedicated air valve supplied with the wheel. Using any other air valve may cause air leakage due to incorrect dimensions or shape.
When replacing tires, always replace the air valves with new air valves specified for the wheel. Reusing old air valves may cause air leakage due to deterioration of the valve grommet (rubber sealing gasket). Use a short-type valve core (JIS Type B, No. 9000).

When replacing tires, replace the air valve with a new dedicated air valve.

TIRE MOUNTING

TIRE MOUNTING

- Aluminum wheels may be designed for tire mounting from either the front rim side or the rear rim side.
  Mount the tire according to the rim shape. If you have any questions, please contact your authorized dealer or the wheel manufacturer.
- When mounting tires, always use an appropriate tire mounting lubricant.Inflate the tire to the specified inflation pressure only after confirming that the tire bead is properly and evenly seated on the rim bead seat around the entire circumference.

When inflating a tire during mounting, take appropriate safety precautions to prevent injury in the event of tire or wheel failure, such as using a tire safety cage. The maximum bead seating pressure (maximum inflation pressure during mounting) is 300 kPa (3.0 kgf/cm²).

After mounting the tire, check for air leaks using a water tank or a soap-and-water solution. Inspect the bead seat area between the tire and rim, the air valve, and all sealing surfaces to ensure there are no leaks. When checking the air valve, inspect both the interface between the valve and the wheel, as well as the valve opening (valve core).

Always perform wheel balancing on all wheels. Installing wheels without proper balancing may cause excessive vibration or resonance and may adversely affect vehicle handling and stability.

VEHICLE-SPECIFIC INSTALLATION PRECAUTIONS

Depending on the vehicle model, the brake drum and wheel mounting surface may have protrusions such as balance weights, assembly bolt heads, locating pins, or washers at the base of the mounting bolts. Before installation, carefully verify that these protruding components do not come into contact with any part of the wheel.

When installing the wheel onto the vehicle, strictly observe the following precautions:**
*Ensure that the vehicle's wheel mounting surface and hub bolts are free of rust, dirt, and deformation.
*Verify that there is no interference between the wheel and the vehicle's mounting components, including locating pins, bolt heads, center hub, washers, or any other protrusions on the mounting surface.

CHECKS AFTER INSTALLATION

After installation, turn the steering wheel fully left and right to confirm that the tires and wheels do not contact any part of the vehicle body.

Confirm that the tires, wheels, caps, and related parts do not protrude beyond the vehicle body or fenders.

DRIVING AFTER WHEEL INSTALLATION

RETIGHTEN NUTS OR BOLTS

After installation or tire rotation, retighten the mounting nuts or bolts to the recommended torque after driving approximately 100 km.

If the vehicle becomes unstable or you notice abnormal vibration or noise while driving, stop immedia-tely in a safe place. If any abnormality is found, do not drive the vehicle until proper replacement or repair has been completed.

DAILY INSPECTION

During daily inspection, always check that the mounting nuts or bolts are not loose. Also check and adjust tire air pressure.

Loose mounting nuts and tire air pressure are the minimum inspection items required for safe driving.

DRIVING OVER OBSTACLES

Driving over sidewalks, curbs, uneven roads, or any impact-inducing obstacles may cause wheel deformation or cracks.

Sudden acceleration, hard braking, sharp turning, and drifting may damage the tires and wheels and can also cause serious accidents. Never perform such driving.

MAINTENANCE INSPECTION

CARE AND CLEANING

To prevent corrosion, fading, and rust on wheels and caps, rinse thoroughly with water after driving near the sea, on snowy roads, or on muddy roads, and wipe off all moisture with a soft cloth.
When using a commercially available wheel cleaner or aluminum wheel cleaner, carefully read and follow the manu-facturer's instructions before use. Some cleaning agents contain chemicals that may damage the surface finish of the wheel, center cap, or other components.
Do not use an automatic car wash, as it may scratch or damage the surface finish of the wheels and center caps. To maintain their appearance, clean the wheels by hand.

STORAGE

Before storing tires and wheels, clean them thoroughly and allow them to dry completely. Store them in a cool, dry place away from direct sunlight, rain, moisture, oil, and excessive heat or humidity.
For storage, reduce the tire inflation pressure to approximately one-half of the normal operating pressure. Before reinstalling the tires and wheels, restore the tire pressure to the specified value, inspect the tires and wheels for any signs of damage or abnormality, and have the wheel balance checked and adjusted if necessary.

When storing, reduce tire air pressure to approximately half of the normal operating pressure.

REPAIRS

Never repair or modify wheels that are deformed or cracked, whether by a repair shop or by the customer.

Improper repair or modification may cause strength reduction that is not visible, making it extremely dangerous. Please consult the dealer regarding repairs.

HANDLING MULTI-PIECE WHEELS

The assembly bolts of 2-piece and 3-piece wheels are tightened to the specified torque during manufacturing.

Never disassemble the rim or disk and never loosen or retighten the assembly bolts.

TECHNICAL STANDARDS

TECHNICAL STANDARDS

This aluminum wheel complies with the Safety Standards for Light Alloy Disc Wheels (JWL or JWL-T) and has passed the strength tests conducted by the Japan Light Alloy Automotive Wheel Testing Council(VIA).

To maintain safety and performance, use the product in accordance with this manual. If you have any questions, please consult the dealer from whom you purchased the product.

WHEEL QUALITY STANDARD CERTIFICATION MARKS

The assembly bolts of 2-piece and 3-piece wheels are tightened to the specified torque during manufacturing.

JWL ◀JWL Certification Mark

The JWL standard is a safety standard for light alloy wheels intend-ed for passenger vehicles (excluding vehicles with a seating capacity of 11 or more persons, motorcycles, and motorcycles with sidecars). Manufacturers are responsible for performing the tests specified under this technical standard. Wheels that have successfully passed these tests are identified by the JWL mark.

JWL-T ◀JWL-T Certification Mark


The JWL-T standard is a safety standard for light alloy wheels intended for trucks and buses. Manufacturers are responsible for performing the tests specified under this technical standard. Wheels that have successfully passed these tests are identified by the JWL-T mark.

VIA ◀VIA Quality Inspection Mark

The VIA mark certifies that the Wheel Light Alloy Testing Council, an independent third-party organization, has verified the wheel's compli-ance with the JWL or JWL-T standards. Products bearing the VIA mark have successfully passed stringent quality and strength verification testsconducted in accordance with the JWL or JWL-T standards.

WHEEL LOAD FORMULA

Wheel Load = Wf/2 or WR/2 Determine using the larger of the following two load values:

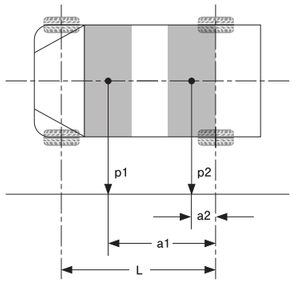

W: Gross Vehicle Weight (GVW)
Wf: Front axle load with all seating positions occupied
Wr: Rear axle load with all seating positions occupied
wf: Front axle load as listed on the vehicle inspection certificate (vehicle registration)
L: Wheelbase (horizontal distance between the front and rear axle centerlines)
a_1, a_2: Horizontal distance from the load application point (located 200mm behind the front edge of the seat cushion) to the rear axle
p_1, p_2: Occupant load (assume 55 kg per person)

THE NAME OF EACH WHEEL PART

